



5SDD 0135Z0401

Housingless Welding Diode

Properties

- High forward current capability
- Low forward and reverse recovery losses

Applications

- Welding equipment
- High current application up to 2 kHz

Key Parameters

V_{RRM}	=	400	V
I_{FAVm}	=	13 526	A
I_{FSM}	=	85 000	A
V_{TO}	=	0.758	V
r_T	=	0.021	mΩ

Types

	V_{RRM}
5SDD 0135Z0401	400 V
Conditions:	$T_j = -40 \div 180^\circ C$, half sine waveform, $f = 50 Hz$

Mechanical Data

F_m	Mounting force	35 ÷ 70 kN
m	Weight	0.14 kg
D_s	Surface creepage distance	2 mm
D_a	Air strike distance	2 mm

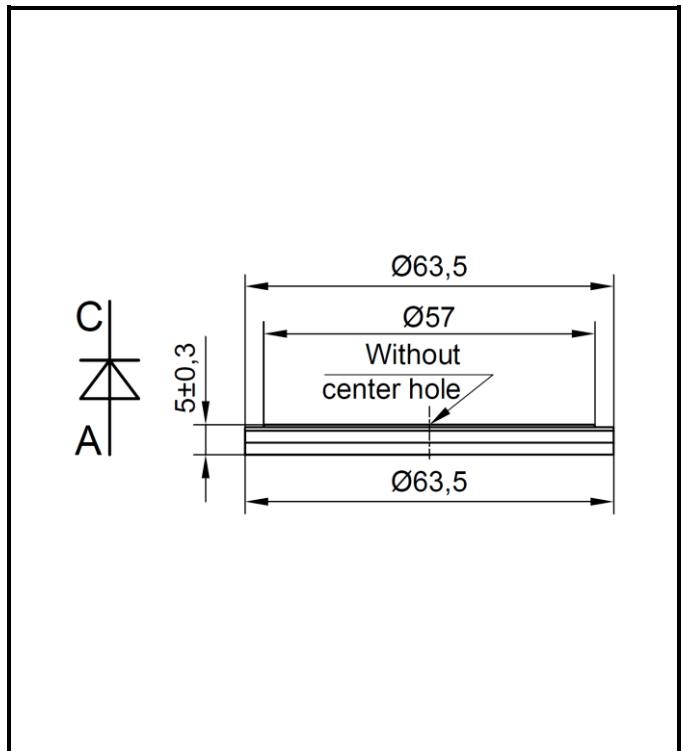


Fig. 1 Case



ABB s.r.o.

Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic
tel.: +420 261 306 250, <http://www.abb.com/semiconductors>


Maximum Ratings			Maximum Limits	Unit
V_{RRM}	Repetitive peak reverse voltage $T_j = -40 \div 180^\circ\text{C}$		400	V
I_{FAVm}	Average forward current	$T_c = 85^\circ\text{C}$	13 526	A
		$T_c = 110^\circ\text{C}$	10 967	
I_{FRMS}	RMS forward current	$T_c = 85^\circ\text{C}$	21 247	A
		$T_c = 110^\circ\text{C}$	17 227	
I_{RRM}	Repetitive reverse current $V_R = V_{RRM}$		75	mA
I_{FSM}	Non repetitive peak surge current $V_R = 0\text{ V, half sine pulse}$	$t_p = 8.3\text{ ms}$	91 000	A
		$t_p = 10\text{ ms}$	85 000	
$\int I^2 t$	Limiting load integral $V_R = 0\text{ V, half sine pulse}$	$t_p = 8.3\text{ ms}$	34 200 000	A ² s
		$t_p = 10\text{ ms}$	36 100 000	
$T_{jmin} - T_{jmax}$	Operating temperature range		- 40 \div 180	°C
$T_{stgmin} - T_{stgmax}$	Storage temperature range		- 40 \div 180	

Unless otherwise specified $T_j = 180^\circ\text{C}$

Characteristics			Value			Unit
			min	typ	max	
V_{TO} r_T	Threshold voltage				0.758	V
	Forward slope resistance $I_{F1} = 10\,000\text{ A}, I_{F2} = 30\,000\text{ A}$				0.021	mΩ
V_{FM}	Maximum forward voltage	$I_{FM} = 8\,000\text{ A}$			0.920	V
		$I_{FM} = 10\,000\text{ A}$			0.970	
Q_{rr}	Recovered charge $I_{FM} = 1\,000\text{ A}, di/dt = -30\text{ A}/\mu\text{s}, V_R = 100\text{ V}$			600		μC

Unless otherwise specified $T_j = 180^\circ\text{C}$

Thermal Parameters			Value	Unit
R_{thjc}	Thermal resistance junction to case	<i>double side cooling</i>	3.9	K/kW
		<i>anode side cooling</i>	5.2	
		<i>cathode side cooling</i>	15.1	
R_{thch}	Thermal resistance case to heatsink	<i>double side cooling</i>	2.6	K/kW
		<i>anode side cooling</i>	4.7	
		<i>cathode side cooling</i>	5.8	

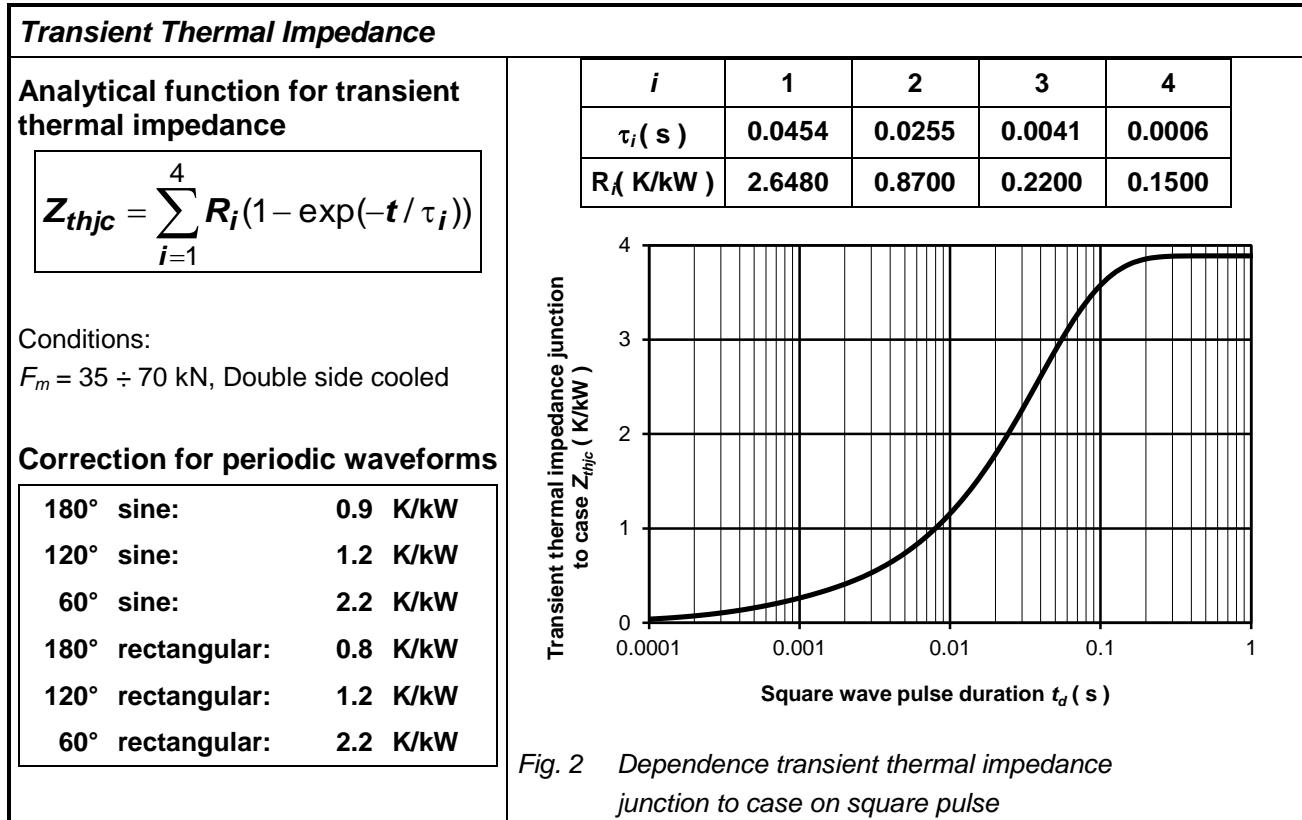

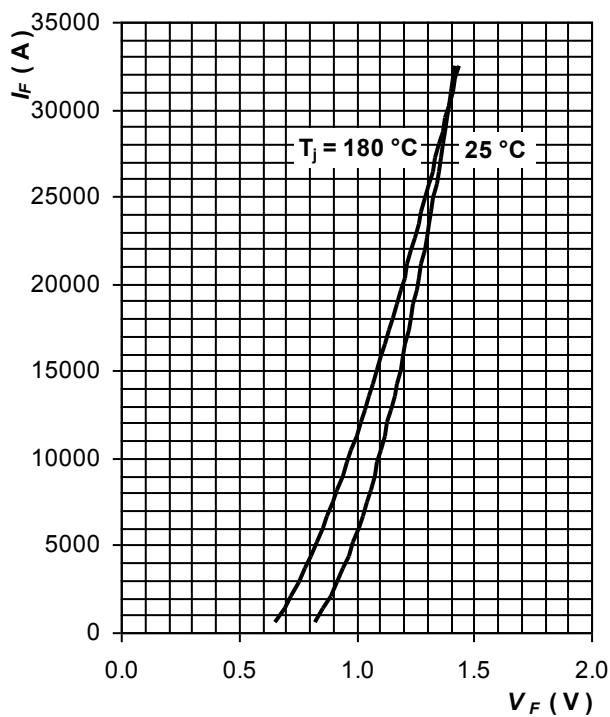


Fig. 3 Maximum forward voltage drop characteristics

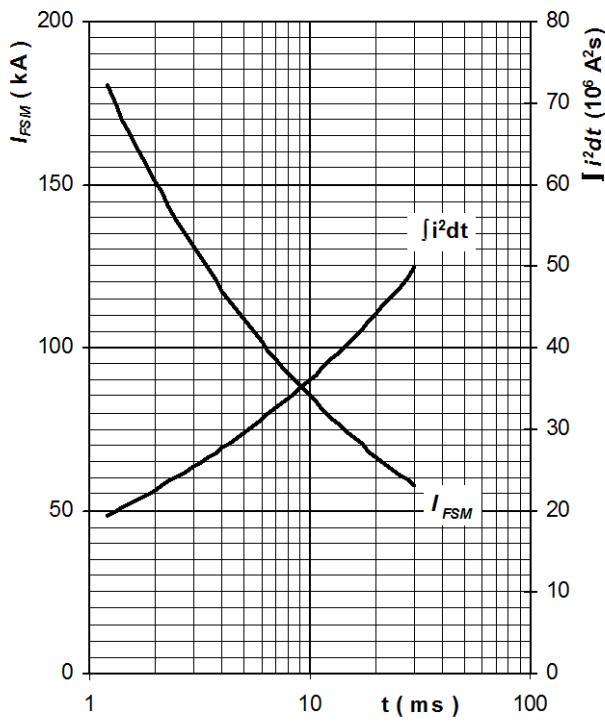


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse,
 $V_R = 0 \text{ V}$, $T_j = T_{jmax}$

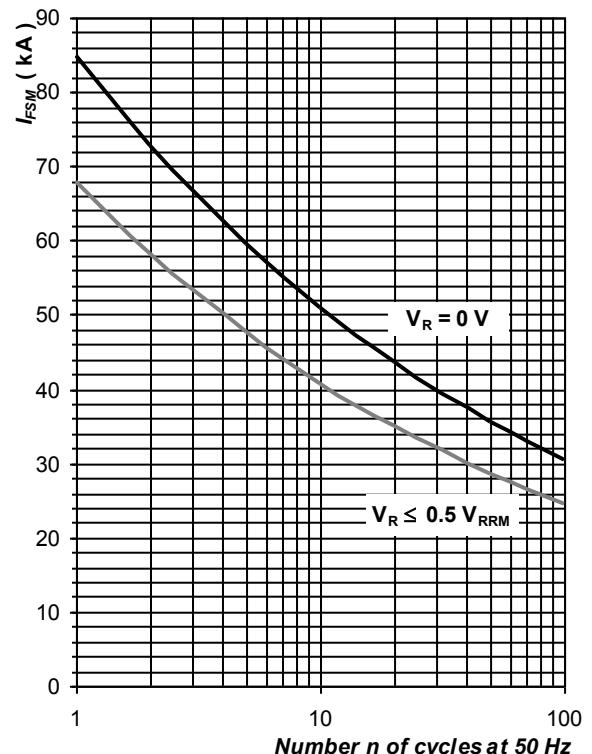


Fig. 5 Surge forward current vs. number of pulses, half sine wave, $T_j = T_{jmax}$

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

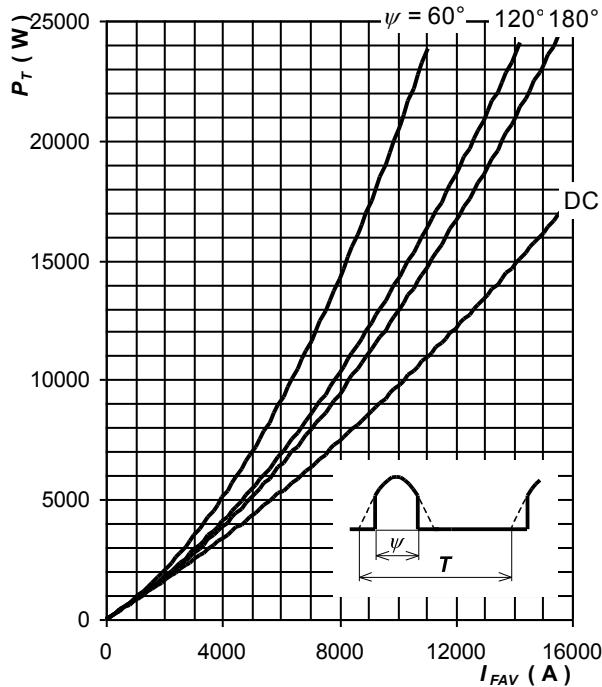


Fig. 6 Forward power loss vs. average forward current, sine waveform, $f = 50$ Hz, $T = 1/f$

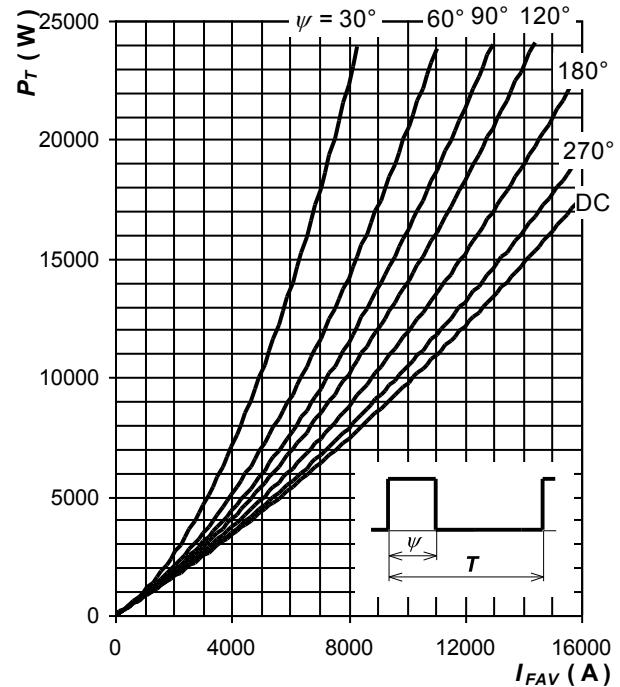


Fig. 7 Forward power loss vs. average forward current, square waveform, $f = 50$ Hz, $T = 1/f$

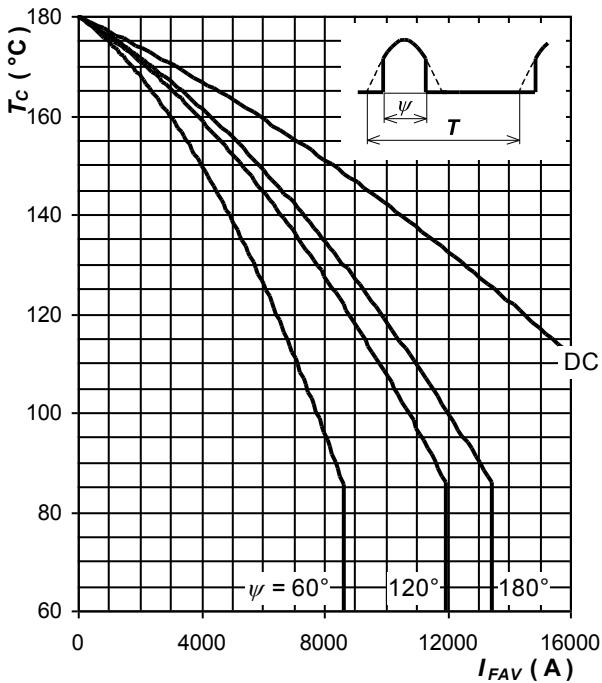


Fig. 8 Max. case temperature vs. aver. forward current, sine waveform, $f = 50$ Hz, $T = 1/f$

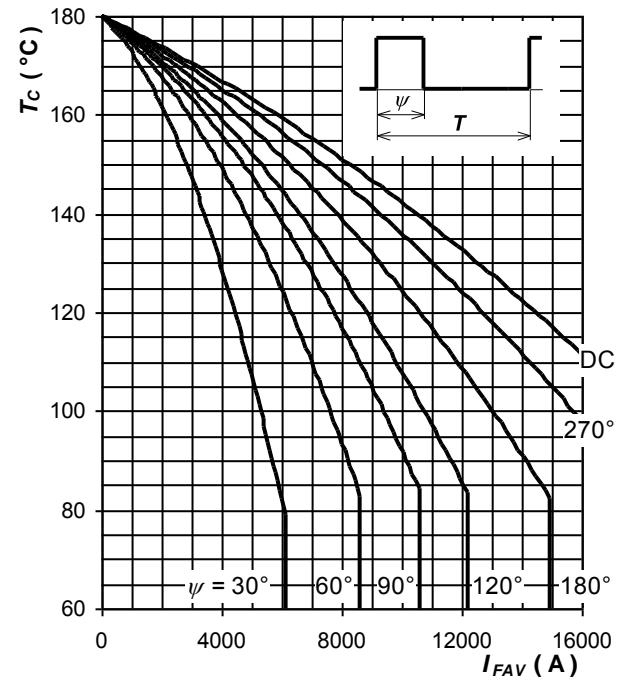


Fig. 9 Max. case temperature vs. aver. forward current, square waveform, $f = 50$ Hz, $T = 1/f$

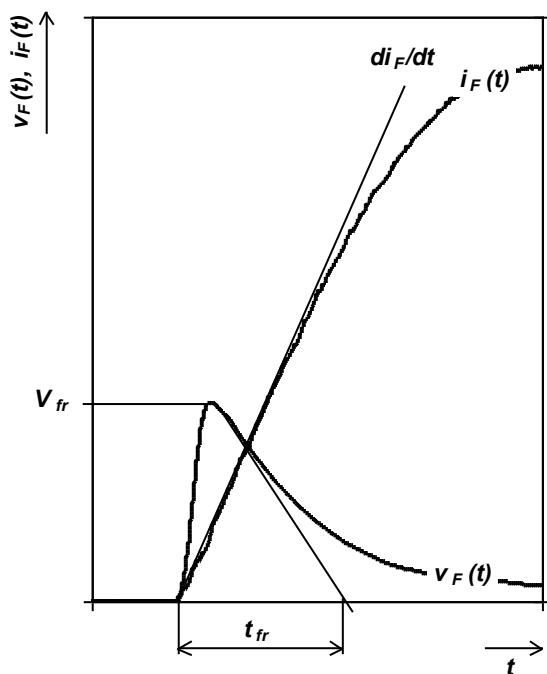


Fig. 10 Typical forward recovery voltage waveform when the diode is turned on with high di_F/dt

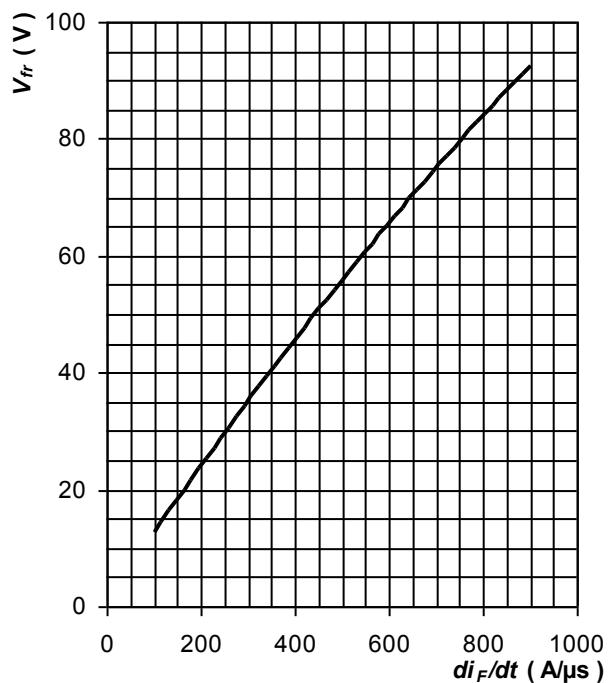


Fig. 11 Max. forward recovery voltage vs. rate of rise forward current, trapezoid pulse, $T_j = T_{jmax}$, $t_{fr} \leq 10 \mu s$

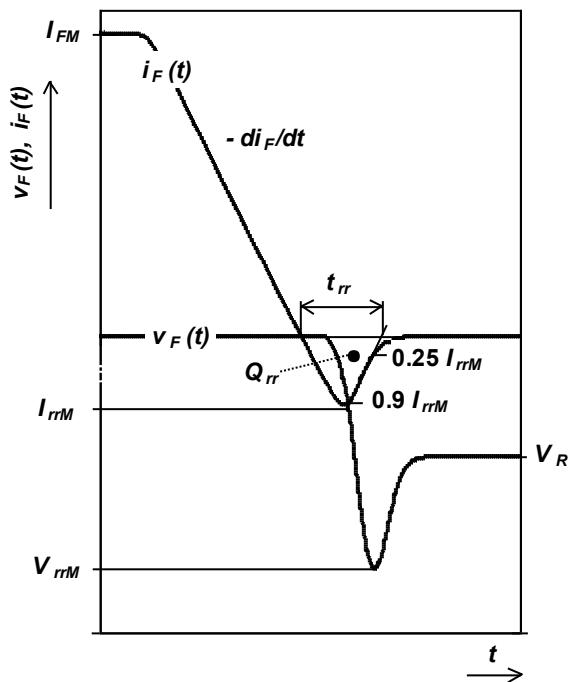


Fig. 12 Definition of reverse recovery parameters

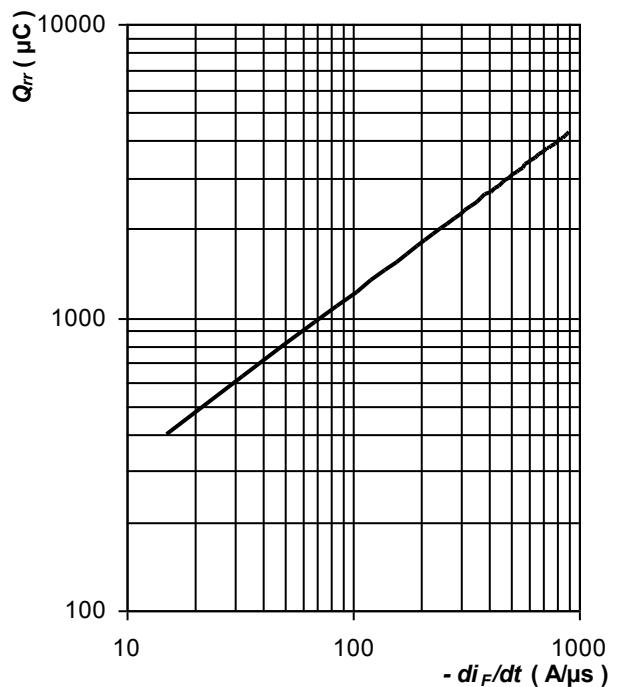


Fig. 13 Max. recovered charge vs. rate of fall forward current, trapezoid pulse, $I_{FM} = 2 000 A$, $V_R = 100 V$, $T_j = T_{jmax}$

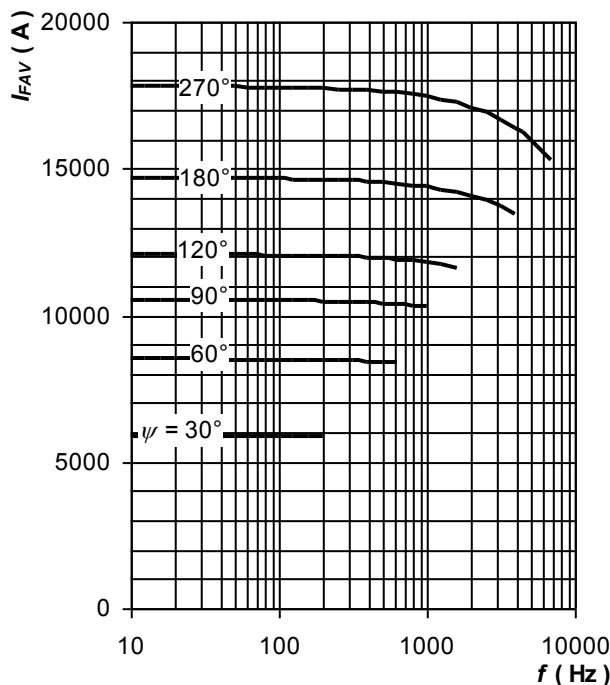


Fig. 14 Average forward current vs. frequency,
trapezoid waveform, $T_C = 85^\circ\text{C}$,
 $dI_F/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$

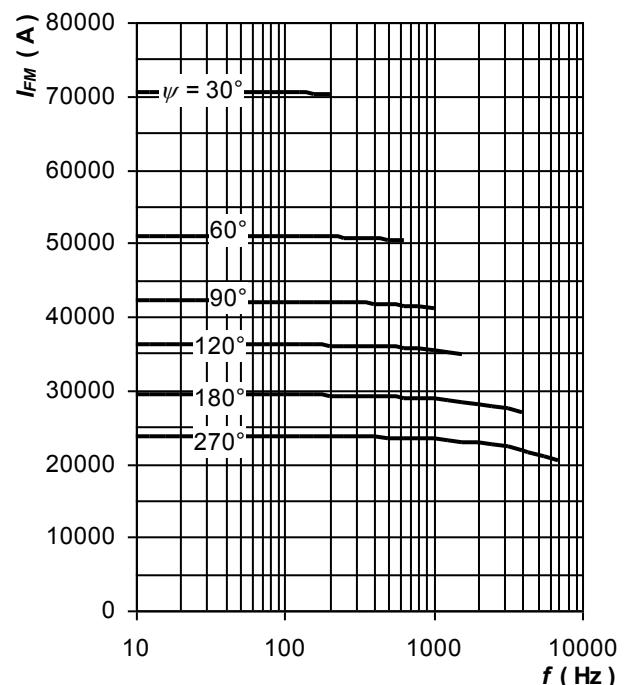


Fig. 15 Maximum forward current vs. frequency,
trapezoid waveform, $T_C = 85^\circ\text{C}$,
 $dI_F/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$

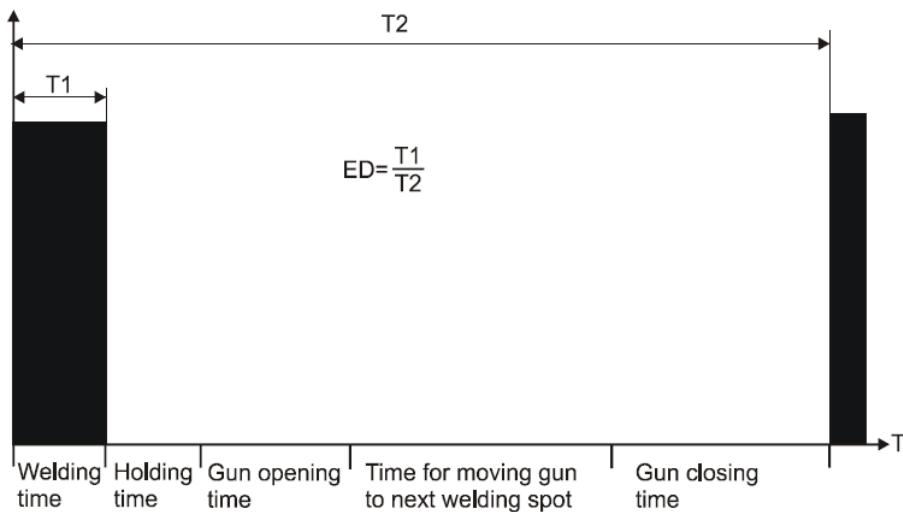


Fig. 16 Definition of ED for typical welding sequence

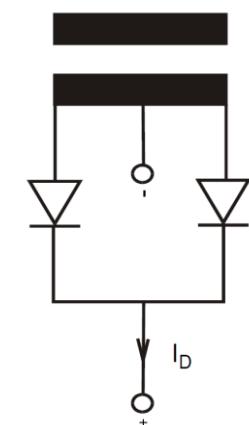


Fig. 17 Definition of I_D for single-phase centre tap

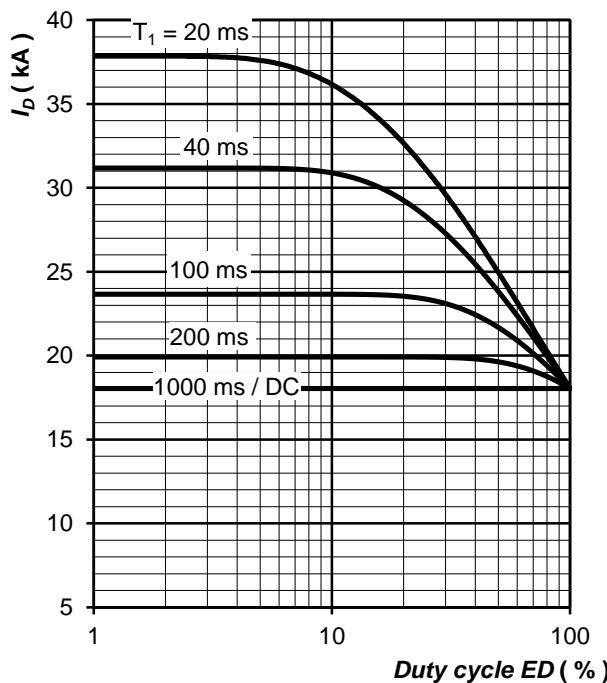


Fig. 18 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 80$ °C

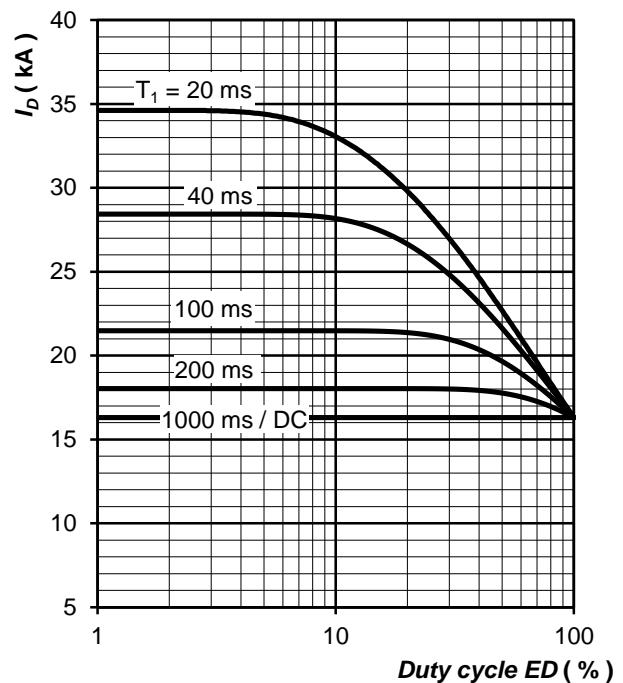


Fig. 19 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 70$ °C

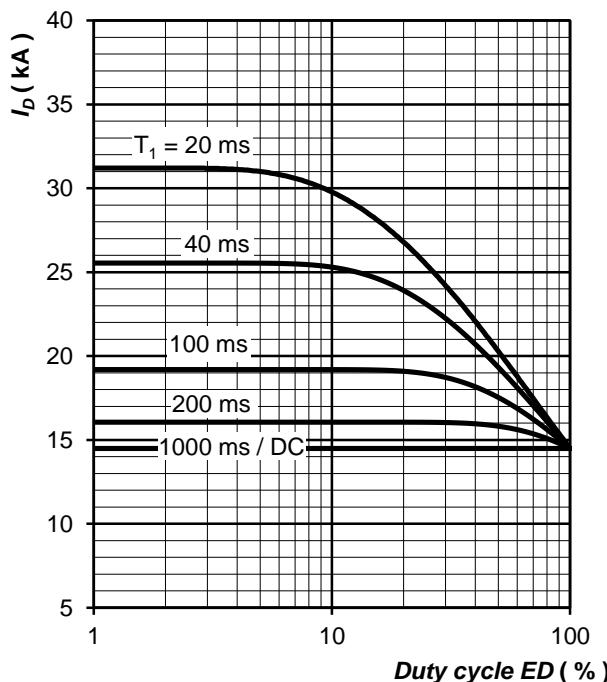


Fig. 20 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 60$ °C

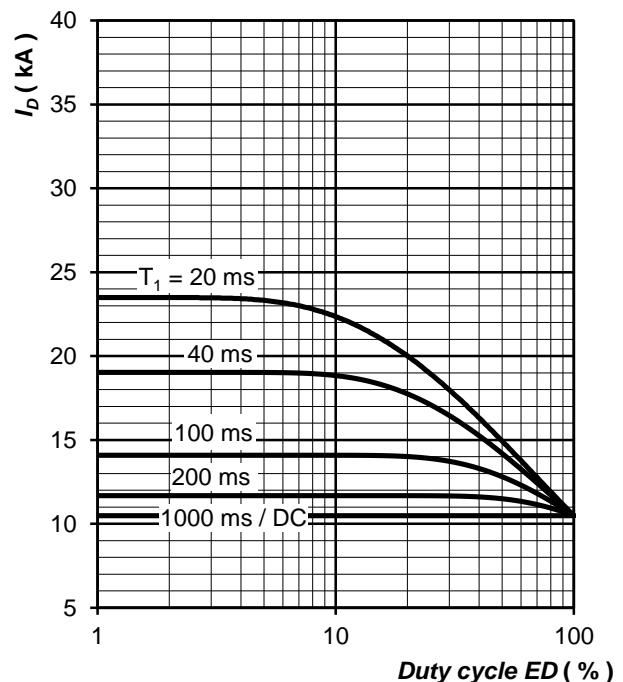


Fig. 21 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 40$ °C

Notes:

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic