



5SDD 71B0400

Old part no. DS 808D-7110-04

Welding diode

Properties

- High forward current capability
- Low forward and reverse recovery losses
- High operational reliability

Key parameters

V_{RRM}	=	400	V
I_{FAVm}	=	7 110	A
I_{FSM}	=	55 000	A
V_{TO}	=	0.740	V
r_T	=	0.026	mΩ

Applications

- Welding equipment
- High current application up to 2000 Hz

Types

type	V_{RRM}
5SDD 71B0400	400 V
5SDD 71B0200	200 V
Conditions:	$T_j = -40 \div 170^\circ\text{C}$, half sine waveform, $f = 50 \text{ Hz}$

Mechanical data

F_m	Mounting force	$22 \pm 2 \text{ kN}$
m	Weight	0.14 kg
D_s	Surface creepage distance	4 mm
D_a	Air strike distance	4 mm

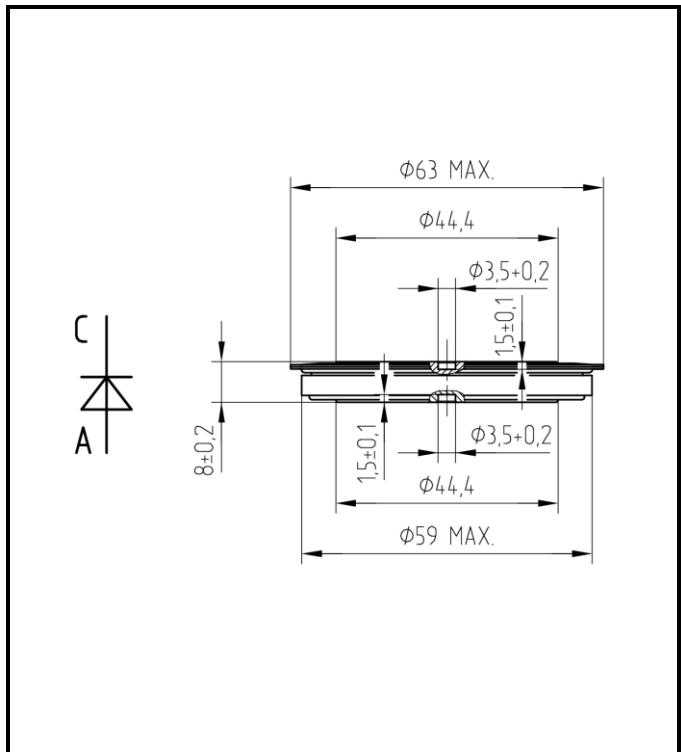


Fig. 1 Case



ABB s.r.o.

Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic
tel.: +420 261 306 250, <http://www.abb.com/semiconductors>

Maximum Ratings			Maximum Limits	Unit
V_{RRM}	Repetitive peak reverse voltage $T_j = -40 \div 170^\circ\text{C}$	5SDD 71B0400 5SDD 71B0200	400 200	V
I_{FAVm}	Average forward current $T_c = 85^\circ\text{C}$		7 110	A
I_{FRMS}	RMS forward current $T_c = 85^\circ\text{C}$		11 200	A
I_R	Repetitive reverse current $V_R = V_{RRM}$		50	mA
I_{FSM}	Nonrepetitive peak surge current $t_p = 10 \text{ ms}, V_R = 0 \text{ V, half sine pulse}$		55 000	A
$\int I^2 t$	Limiting load integral $t_p = 10 \text{ ms}, V_R = 0 \text{ V, half sine pulse}$		15 125 000	A ² s
$T_{jmin} - T_{jmax}$	Operating temperature range		- 40 \div 170	°C
$T_{stgmin} - T_{stgmax}$	Storage temperature range		- 40 \div 170	°C

Unless otherwise specified $T_j = 170^\circ\text{C}$

Characteristics			Value			Unit
			min	typ	max	
V_{TO}	Threshold voltage				0.740	V
	Forward slope resistance $I_{F1} = 5 \text{ 000 A}, I_{F2} = 15 \text{ 000 A}$				0.026	mΩ
V_{FM}	Maximum forward voltage	$I_{FM} = 5 \text{ 000 A}, T_j = 25^\circ\text{C}$			1.05	V
		$I_{FM} = 5 \text{ 000 A}$			0.87	
Q_{rr}	Recovered charge $I_{FM} = 1000 \text{ A}, di/dt = -30 \text{ A}/\mu\text{s}, V_R = 50 \text{ V}$			300		μC

Unless otherwise specified $T_j = 170^\circ\text{C}$

Thermal Specifications			Value	Unit
R_{thjc}	Thermal resistance junction to case	<i>double side cooling</i>	10	K/kW
		<i>single side cooling</i>	20	K/kW
R_{thch}	Thermal resistance case to heatsink	<i>double side cooling</i>	5	K/kW
		<i>single side cooling</i>	10	K/kW

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

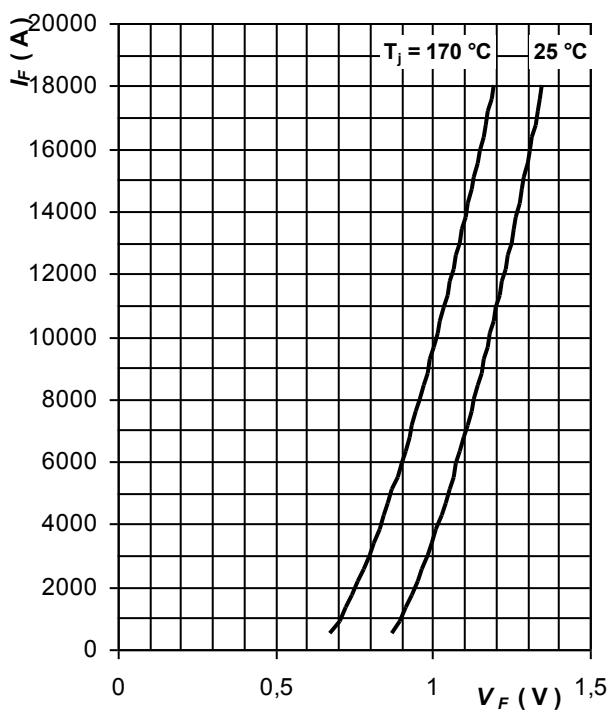
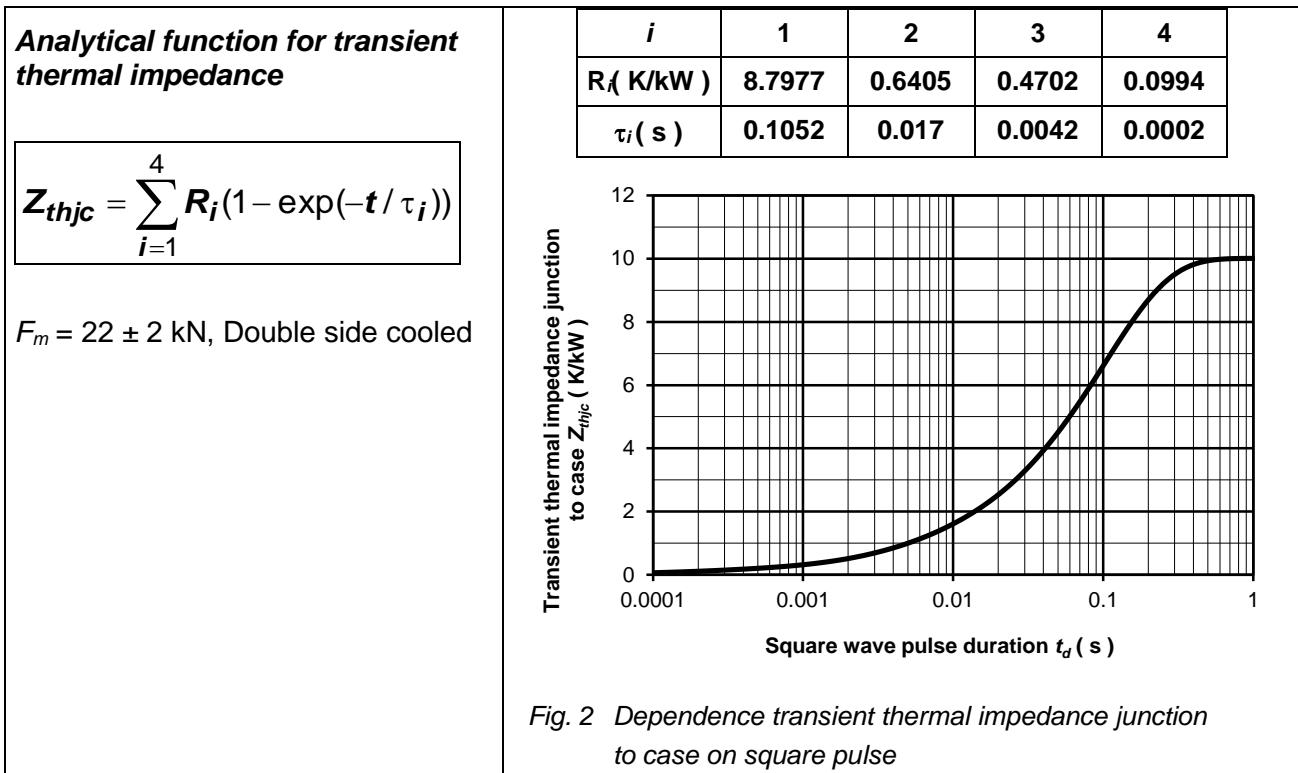


Fig. 3 Maximum forward voltage drop characteristics

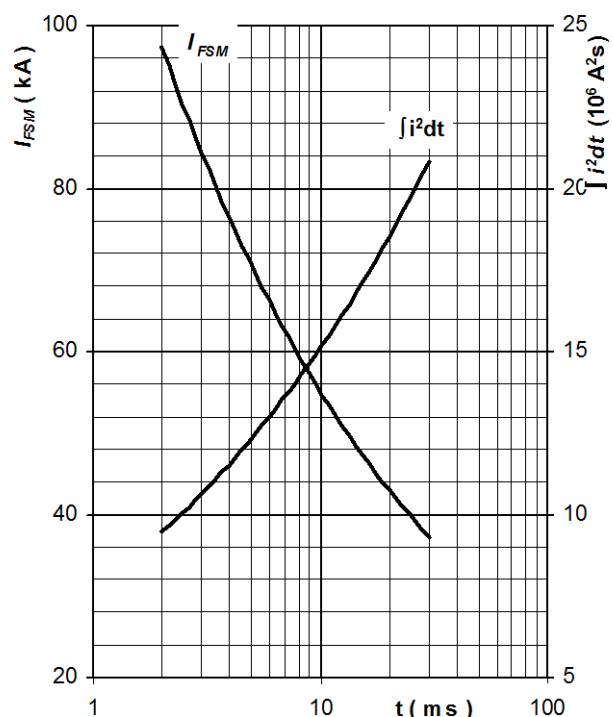


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse, $V_R = 0$ V, $T_j = T_{jmax}$

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

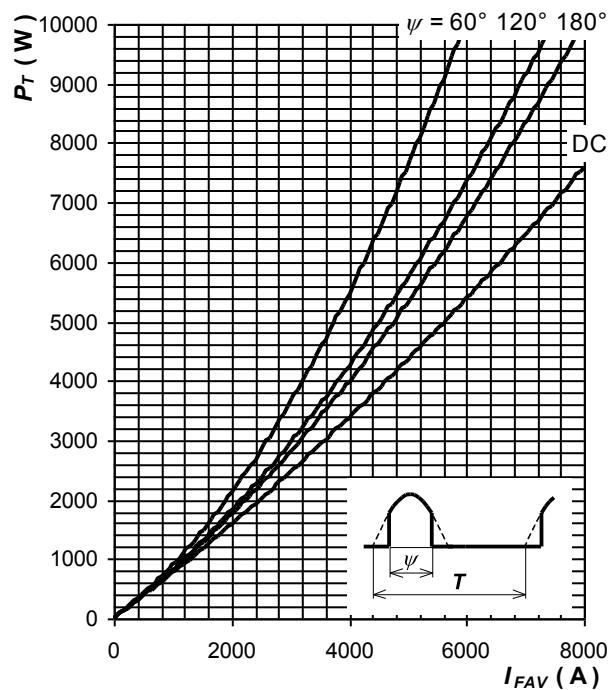


Fig. 5 Forward power loss vs. average forward current, sine waveform, $f = 50$ Hz

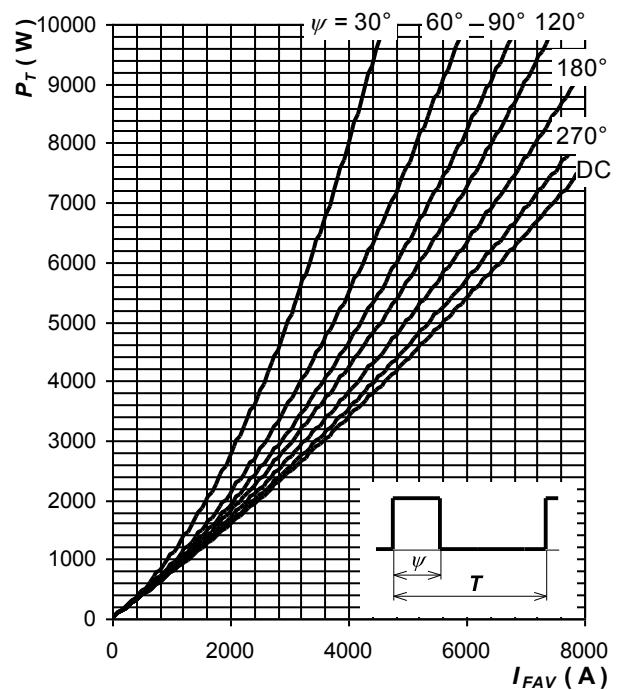


Fig. 6 Forward power loss vs. average forward current, square waveform, $f = 50$ Hz

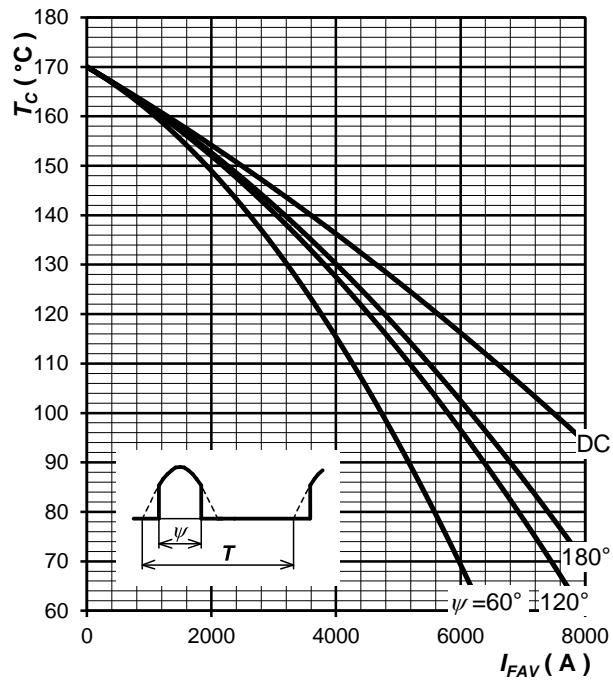


Fig. 7 Max. case temperature vs. aver. forward current, sine waveform, $f = 50$ Hz






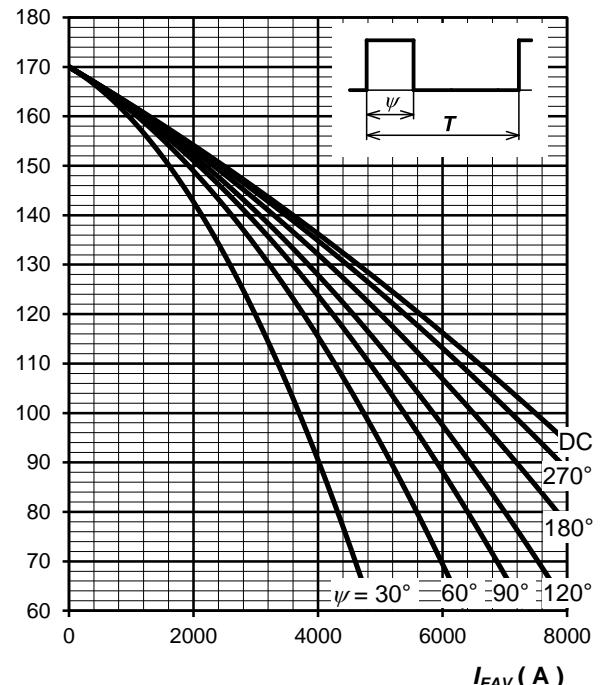



Fig. 8 Max. case temperature vs. aver. forward current, square waveform, $f = 50$ Hz

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

Fig. 9 Definition of ED for typical welding sequenceFig. 10 Definition of I_D for single-phase centre tapFig. 11 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 80$ °CFig. 12 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 70$ °C

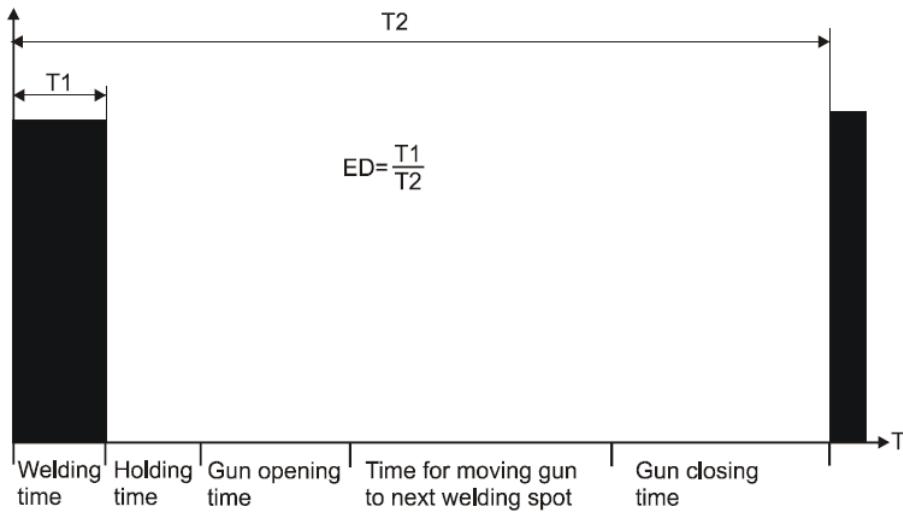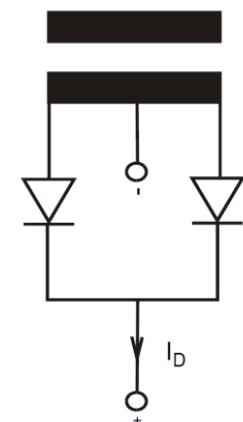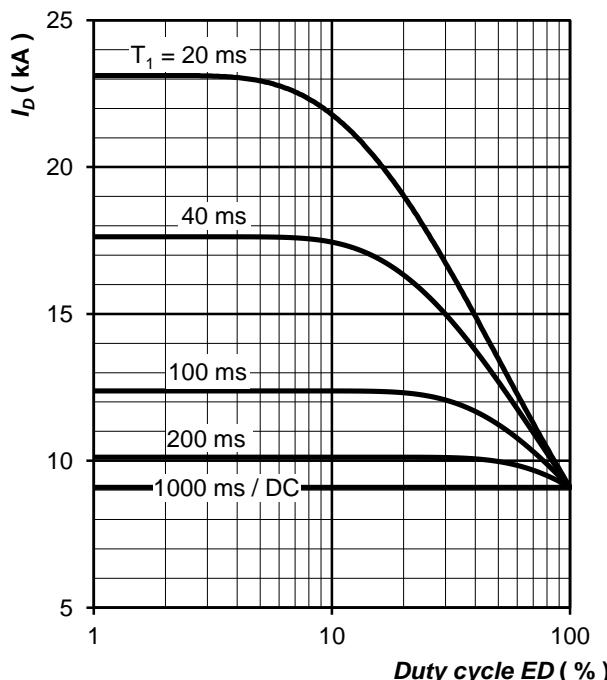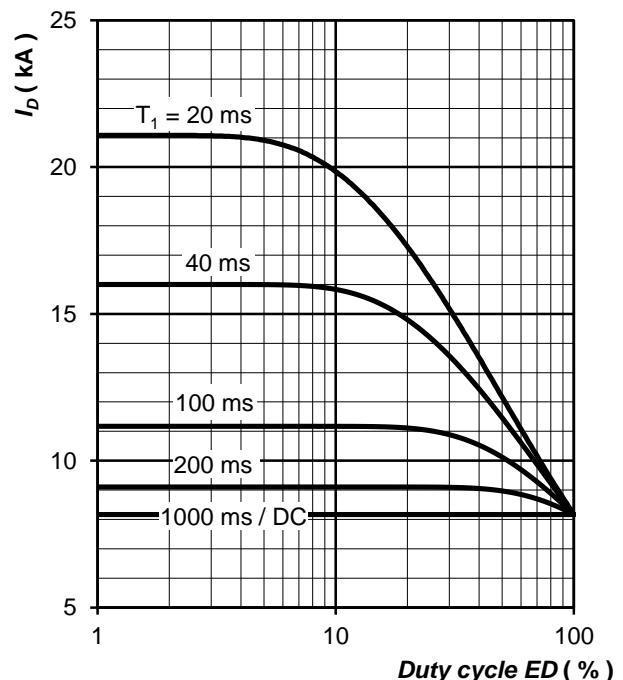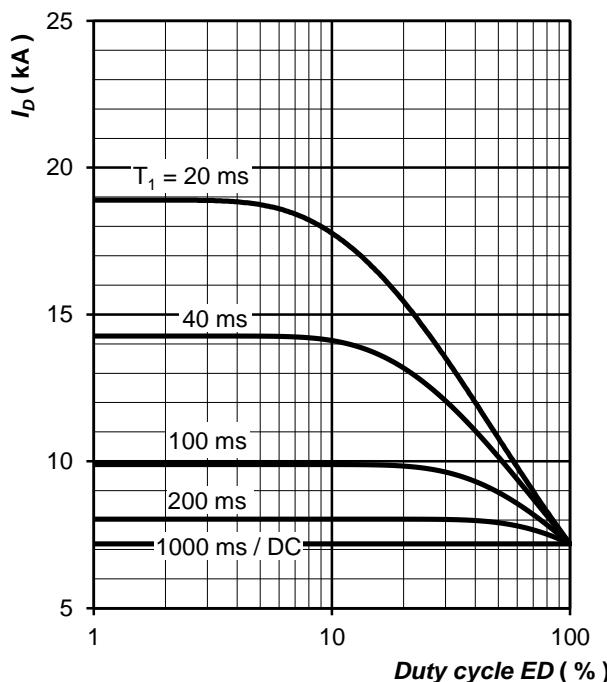

*Fig. 13 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000 \text{ Hz}$, square wave, $\Delta T_j = 60 \text{ }^{\circ}\text{C}$*

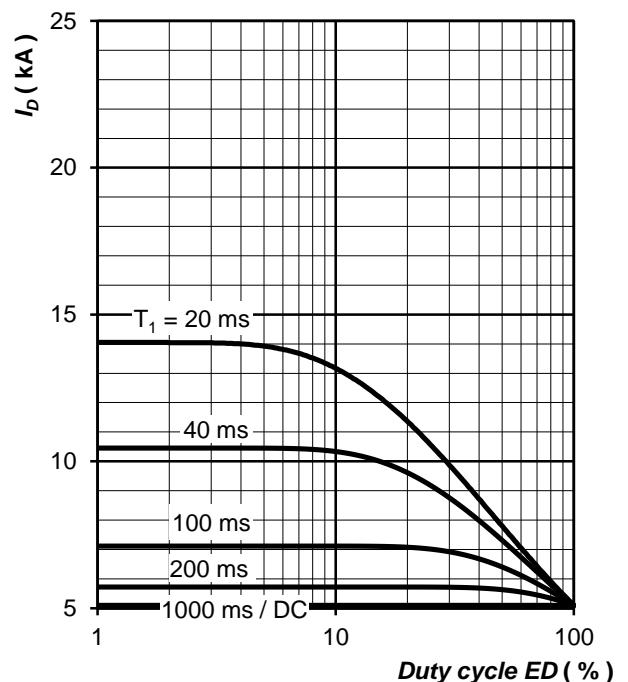

*Fig. 14 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000 \text{ Hz}$, square wave, $\Delta T_j = 40 \text{ }^{\circ}\text{C}$*

Notes: