

# Thyristor

$V_{RRM}$  = 1600V  
 $I_{TAV}$  = 158A  
 $V_T$  = 1.37V

## Single Thyristor


### Part number

MCO150-16io1



Backside: isolated

 E72873

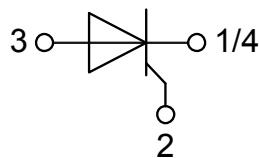

### Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability

### Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

### Package: SOT-227B (minibloc)


- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Thyristor			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1700	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1600	V
$I_{RD}$	reverse current, drain current	$V_{RD} = 1600 V$ $V_{RD} = 1600 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		100 10	$\mu A$ mA
$V_T$	forward voltage drop	$I_T = 150 A$ $I_T = 300 A$ $I_T = 150 A$ $I_T = 300 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.37 1.78 1.37 1.89	V V
$I_{TAV}$	average forward current	$T_C = 80^\circ C$	$T_{VJ} = 150^\circ C$		158	A
$I_{T(RMS)}$	RMS forward current	180° sine			250	A
$V_{TO}$ $r_T$	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ C$		0.84 3.5	V $m\Omega$
$R_{thJC}$	thermal resistance junction to case				0.2	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.10		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ C$		620	W
$I_{TSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 V$ $T_{VJ} = 150^\circ C$ $V_R = 0 V$		2.00 2.16 1.70 1.84	kA kA
$I^2t$	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 V$ $T_{VJ} = 150^\circ C$ $V_R = 0 V$		20.0 19.4 14.5 14.0	$kA^2s$ $kA^2s$ $kA^2s$ $kA^2s$
$C_J$	junction capacitance	$V_R = 400 V$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	119		pF
$P_{GM}$	max. gate power dissipation	$t_p = 30 \mu s$ $t_p = 300 \mu s$	$T_C = 150^\circ C$		10 5 0.5	W W W
$P_{GAV}$	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 150^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 450 A$ $t_p = 200 \mu s; di_G/dt = 0.45 A/\mu s;$ $I_G = 0.45 A; V_D = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 150 A$			150	A/ $\mu s$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V_D = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$ ; method 1 (linear voltage rise)	$T_{VJ} = 150^\circ C$		1000	V/ $\mu s$
$V_{GT}$	gate trigger voltage	$V_D = 6 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		1.4 1.6	V V
$I_{GT}$	gate trigger current	$V_D = 6 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		150 200	mA mA
$V_{GD}$	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ C$		0.2	V
$I_{GD}$	gate non-trigger current				10	mA
$I_L$	latching current	$t_p = 10 \mu s$ $I_G = 0.45 A; di_G/dt = 0.45 A/\mu s$	$T_{VJ} = 25^\circ C$		450	mA
$I_H$	holding current	$V_D = 6 V$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ C$		200	mA
$t_{gd}$	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$ $I_G = 0.45 A; di_G/dt = 0.45 A/\mu s$	$T_{VJ} = 25^\circ C$		2	$\mu s$
$t_q$	turn-off time	$V_R = 100 V; I_T = 150 A; V_D = \frac{2}{3} V_{DRM}$ $T_{VJ} = 150^\circ C$ $di/dt = 10 A/\mu s; dv/dt = 15 V/\mu s; t_p = 200 \mu s$		150		$\mu s$

Package SOT-227B (minibloc)			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	RMS current	per terminal <sup>1)</sup>			150	A
$T_{VJ}$	virtual junction temperature		-40		150	°C
$T_{op}$	operation temperature		-40		125	°C
$T_{stg}$	storage temperature		-40		150	°C
Weight				30		g
$M_D$	mounting torque		1.1		1.5	Nm
$M_T$	terminal torque		1.1		1.5	Nm
$d_{Spp/App}$	creepage distance on surface / striking distance through air		terminal to terminal	10.5	3.2	mm
$d_{Spb/Abp}$			terminal to backside	8.6	6.8	mm
$V_{ISOL}$	isolation voltage	t = 1 second t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA		3000 2500	V V

<sup>1)</sup>  $I_{RMS}$  is typically limited by the pin-to-chip resistance (1); or by the current capability of the chip (2). In case of (1) and a product with multiple pins for one chip-potential, the current capability can be increased by connecting the pins as one contact.

### Product Marking

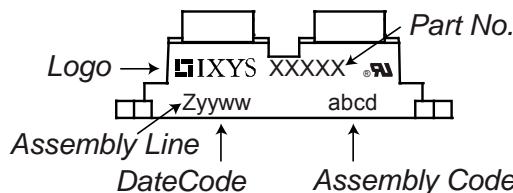


Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCO150-16io1	MCO150-16io1	Tube	10	498629

### Equivalent Circuits for Simulation


\* on die level

$T_{VJ} = 150$  °C


	Thyristor
$V_{0\max}$	threshold voltage
$R_{0\max}$	slope resistance *

0.84 V  
1.6 mΩ

## Outlines SOT-227B (minibloc)

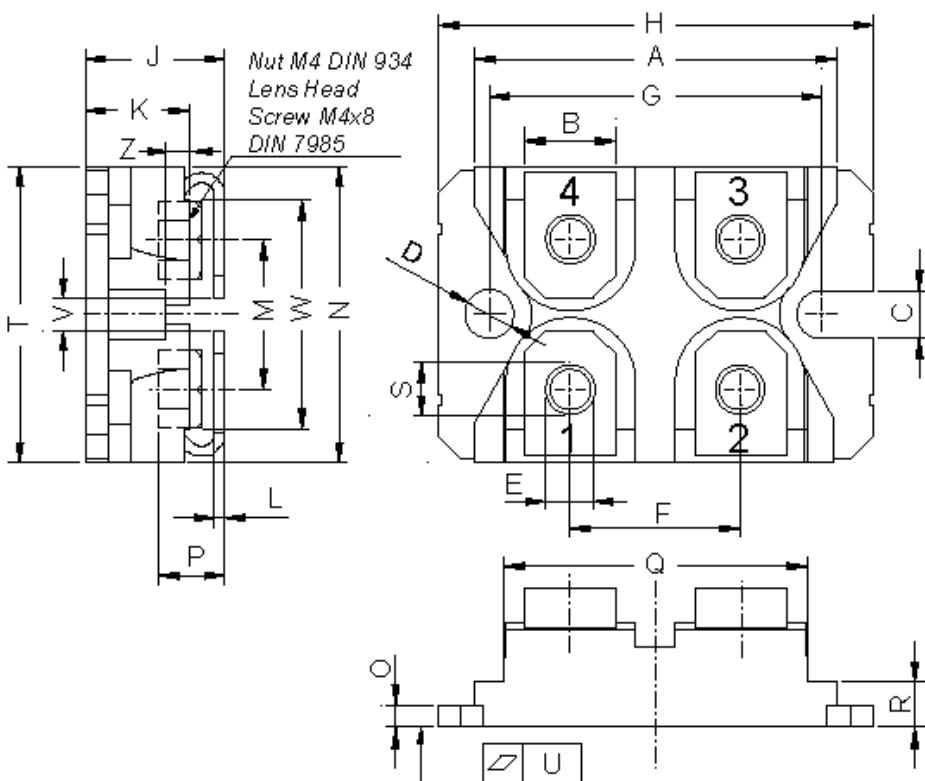

Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

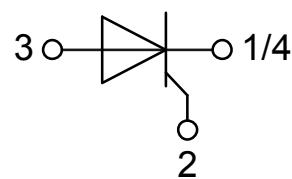

**Thyristor**