



Thyristor

V_{RRM} = 1600 V
 I_{TAV} = 30 A
 V_T = 1.35 V

Three Quadrants operation: QI - QIII
 1~ Triac


Part number

CMA60MT1600NHR

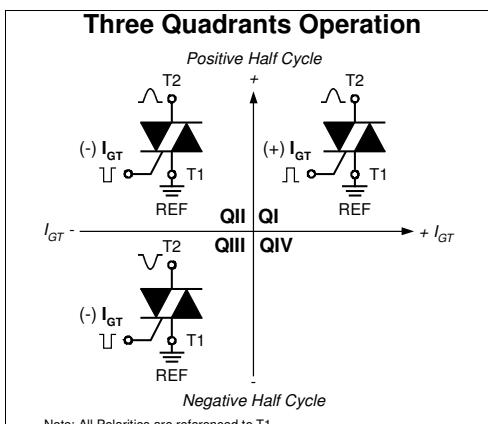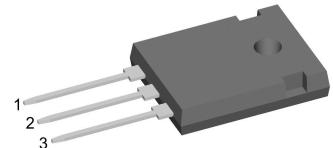

Backside: isolated

E72873



Features / Advantages:

- Triac for line frequency
- Three Quadrants Operation - QI - QIII
- Planar passivated chip
- Long-term stability of blocking currents and voltages

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: ISO247

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Soldering pins for PCB mounting
- Backside: DCB ceramic
- Reduced weight
- Advanced power cycling

Terms and Conditions of Usage

The data contained in this product data sheet is exclusively intended for technically trained staff. The user will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to his application. The specifications of our components may not be considered as an assurance of component characteristics. The information in the valid application- and assembly notes must be considered. Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of your product, please contact your local sales office.


Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact your local sales office.

Should you intend to use the product in aviation, in health or life endangering or life support applications, please notify. For any such application we urgently recommend

- to perform joint risk and quality assessments;
- the conclusion of quality agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery dependent on the realization of any such measures.

| Rectifier | | | Ratings | | | |
|----------------|--|--|---|------|------------------------------|---------------|
| Symbol | Definition | Conditions | min. | typ. | max. | Unit |
| $V_{RSM/DSM}$ | max. non-repetitive reverse/forward blocking voltage | $T_{VJ} = 25^\circ C$ | | | 1700 | V |
| $V_{RRM/DRM}$ | max. repetitive reverse/forward blocking voltage | $T_{VJ} = 25^\circ C$ | | | 1600 | V |
| $I_{R/D}$ | reverse current, drain current | $V_{R/D} = 1600 V$ $V_{R/D} = 1600 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | | 10 2 | μA mA |
| V_T | forward voltage drop | $I_T = 30 A$ $I_T = 60 A$ $I_T = 30 A$ $I_T = 60 A$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | | 1.36 1.70 1.35 1.79 | V V |
| I_{TAV} | average forward current | $T_C = 90^\circ C$ | $T_{VJ} = 150^\circ C$ | | 30 | A |
| I_{RMS} | RMS forward current per phase | 180° sine | | | 66 | A |
| V_{TO} | threshold voltage | r_T slope resistance } for power loss calculation only | $T_{VJ} = 150^\circ C$ | | 0.89 | V |
| | slope resistance | | | | 15.1 | $m\Omega$ |
| R_{thJC} | thermal resistance junction to case | | | | 0.9 | K/W |
| R_{thCH} | thermal resistance case to heatsink | | | | 0.25 | K/W |
| P_{tot} | total power dissipation | | $T_C = 25^\circ C$ | | 140 | W |
| I_{TSM} | max. forward surge current | $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ | $T_{VJ} = 45^\circ C$ $V_R = 0 V$ $T_{VJ} = 150^\circ C$ $V_R = 0 V$ | | 260 280 220 240 | A |
| I^2t | value for fusing | $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ | $T_{VJ} = 45^\circ C$ $V_R = 0 V$ $T_{VJ} = 150^\circ C$ $V_R = 0 V$ | | 340 325 240 240 | A^2s |
| C_J | junction capacitance | $V_R = 400 V$ $f = 1 \text{ MHz}$ | $T_{VJ} = 25^\circ C$ | | 9 | pF |
| P_{GM} | max. gate power dissipation | $t_p = 30 \mu s$ $t_p = 300 \mu s$ | $T_C = 150^\circ C$ | | 10 5 0.5 | W |
| P_{GAV} | average gate power dissipation | | | | | W |
| $(di/dt)_{cr}$ | critical rate of rise of current | $T_{VJ} = 125^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 90 A$ $t_p = 200 \mu s; di_G/dt = 0.2 A/\mu s;$ $I_G = 0.2 A; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 30 A$ | | | 150 | $A/\mu s$ |
| $(dv/dt)_{cr}$ | critical rate of rise of voltage | $V = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise) | $T_{VJ} = 125^\circ C$ | | 500 | $V/\mu s$ |
| V_{GT} | gate trigger voltage | $V_D = 6 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$ | | 1.3 1.6 | V |
| I_{GT} | gate trigger current | $V_D = 6 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$ | | ± 60 ± 80 | mA |
| V_{GD} | gate non-trigger voltage | $V_D = \frac{2}{3} V_{DRM}$ | $T_{VJ} = 125^\circ C$ | | 0.2 | V |
| I_{GD} | gate non-trigger current | | | | ± 1 | mA |
| I_L | latching current | $t_p = 10 \mu s$ $I_G = 0.2 A; di_G/dt = 0.2 A/\mu s$ | $T_{VJ} = 25^\circ C$ | | 90 | mA |
| I_H | holding current | $V_D = 6 V$ $R_{GK} = \infty$ | $T_{VJ} = 25^\circ C$ | | 60 | mA |
| t_{gd} | gate controlled delay time | $V_D = \frac{1}{2} V_{DRM}$ $I_G = 0.5 A; di_G/dt = 0.5 A/\mu s$ | $T_{VJ} = 25^\circ C$ | | 2 | μs |
| t_q | turn-off time | $V_R = 100 V; I_T = 30 A; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ C$ $di/dt = 10 A/\mu s$ $dv/dt = 20 V/\mu s$ $t_p = 200 \mu s$ | | 150 | | μs |

| Package ISO247 | | | Ratings | | | |
|----------------|--|----------------------------------|-------------------------------------|------|--------------|--------|
| Symbol | Definition | Conditions | min. | typ. | max. | Unit |
| I_{RMS} | RMS current | per terminal | | | 70 | A |
| T_{VJ} | virtual junction temperature | | -55 | | 150 | °C |
| T_{op} | operation temperature | | -55 | | 125 | °C |
| T_{stg} | storage temperature | | -55 | | 150 | °C |
| Weight | | | | 6 | | g |
| M_d | mounting torque | | 0.8 | | 1.2 | Nm |
| F_c | mounting force with clip | | 20 | | 120 | N |
| $d_{Spp/App}$ | creepage distance on surface / striking distance through air | | terminal to terminal | 2.7 | | mm |
| $d_{Spb/Apb}$ | | | terminal to backside | 4.1 | | mm |
| V_{ISOL} | isolation voltage | $t = 1$ second $t = 1$ minute | 50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA | | 3600 3000 | V V |

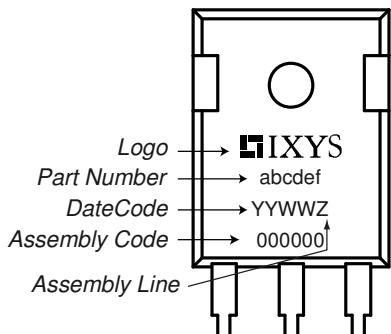Product Marking**Part description**

C = Thyristor (SCR)
 M = Thyristor
 A = (up to 1800V)
 60 = Current Rating [A]
 MT = 1~ Triac
 1600 = Reverse Voltage [V]
 N = Three Quadrants operation: Q1 - QIII
 HR = ISO247 (3)

| Ordering | Ordering Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-----------------|--------------------|---------------|----------|----------|
| Standard | CMA60MT1600NHR | CMA60MT1600NHR | Tube | 30 | 517853 |

| Similar Part | Package | Voltage class |
|----------------|--------------|---------------|
| CMA60MT1600NHB | TO-247AD (3) | 1600 |



Equivalent Circuits for Simulation

* on die level

 $T_{VJ} = 150$ °C

| | | | | |
|-------------|--------------------|-------|-----------|----|
| | V_0 | R_0 | Thyristor | |
| $V_{0\max}$ | threshold voltage | 0.89 | | V |
| $R_{0\max}$ | slope resistance * | 12.6 | | mΩ |

Outlines ISO247

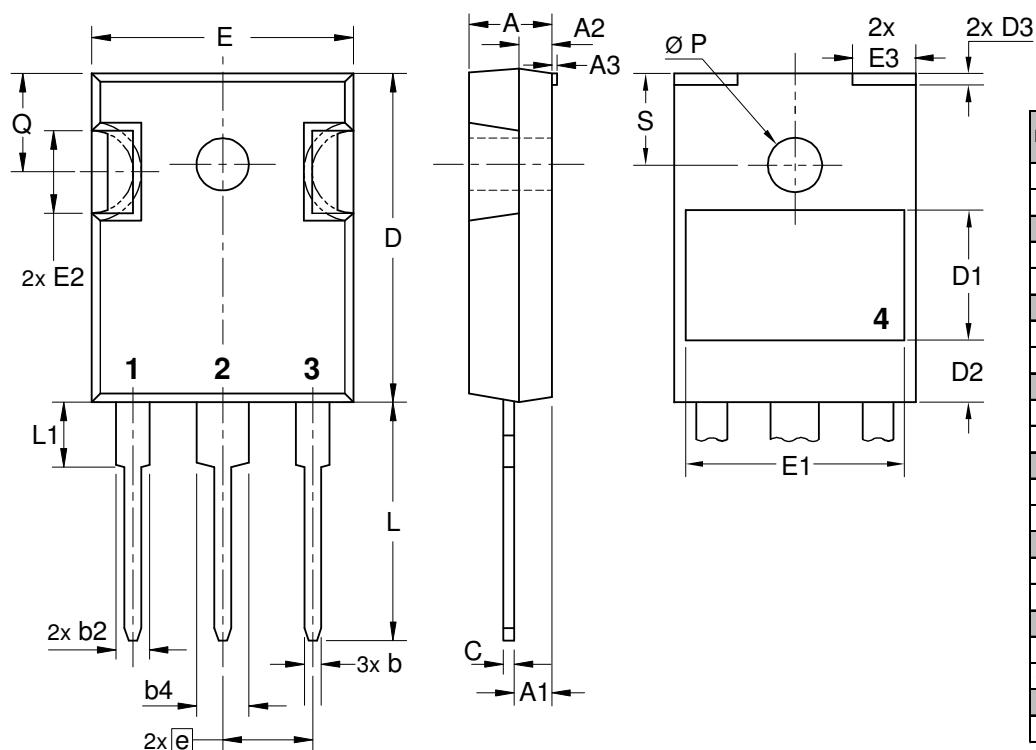

Thyristor

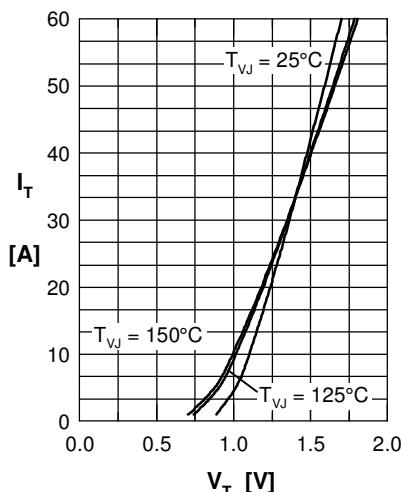


Fig. 1 Forward characteristics

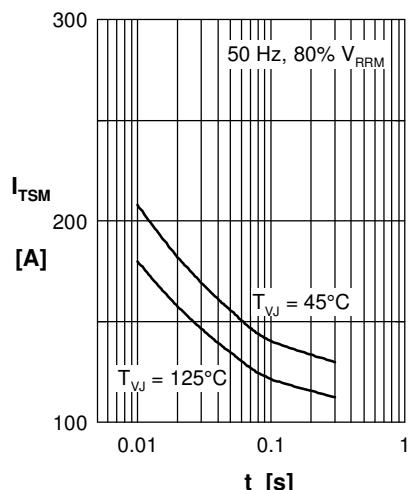
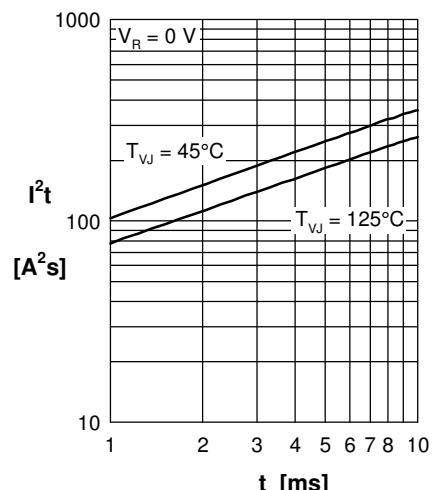
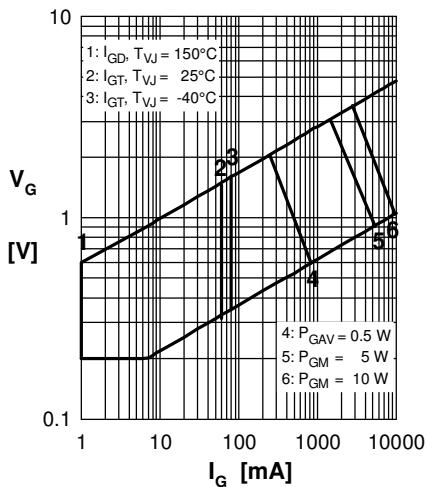
Fig. 2 Surge overload current
 I_{TSM} : crest value, t : durationFig. 3 I^2t versus time (1-10 s)

Fig. 4 Gate voltage & gate current

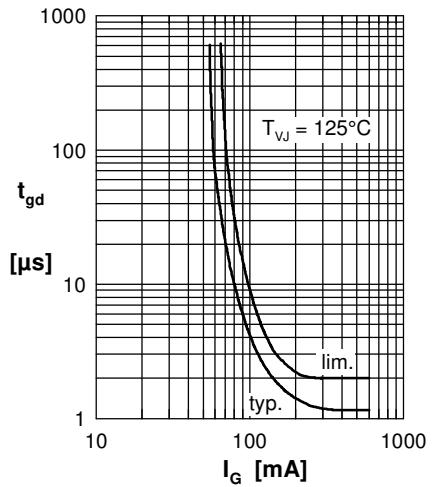
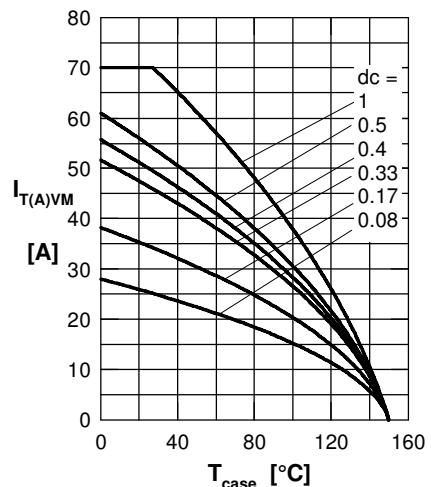
Fig. 5 Gate controlled delay time t_{gd} 

Fig. 6 Max. forward current at case temperature

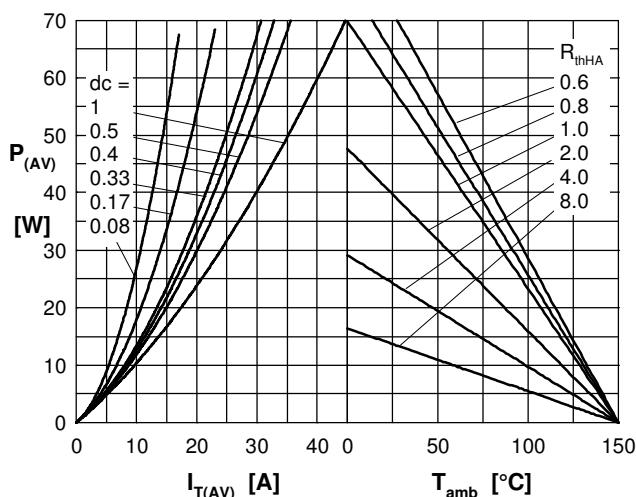
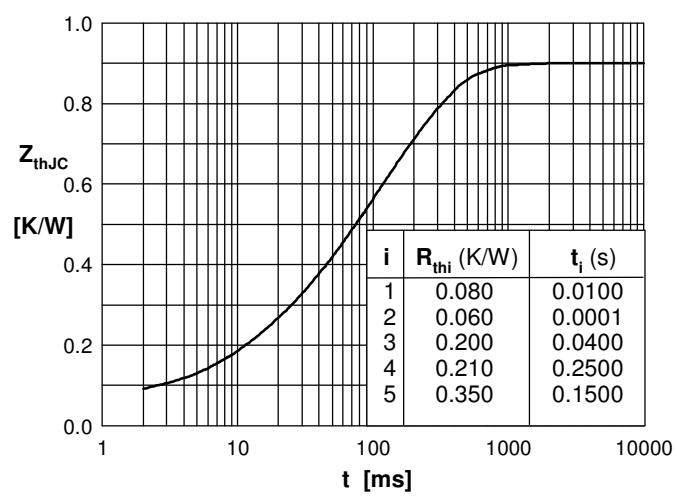
Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

Fig. 8 Transient thermal impedance junction to case