

$V_{RRM}$  = 200 V  
 $I_{FAVM}$  = 7110 A  
 $I_{FRMS}$  = 11200 A  
 $I_{FSM}$  = 55000 A  
 $V_{F0}$  = 0.74 V  
 $r_F$  = 0.026 mW

# Rectifier Diode

## 5SDD 71B0200

Doc. No. 5SYA1132-02 July 06


- Optimized for high current rectifiers
- Very low on-state voltage
- Very low thermal resistance

### Blocking

$V_{RRM}$	Repetitive peak reverse voltage	200 V	Half sine wave, $t_P = 10$ ms, $f = 50$ Hz
$V_{RSM}$	Maximum peak reverse voltage	300 V	Half sine wave, $t_P = 10$ ms
$I_{RRM}$	Repetitive peak reverse current	$\leq 50$ mA	$T_j = 170$ °C $V_R = V_{RRM}$

### Mechanical

$F_M$	Mounting force	min.	20 kN
		max.	24 kN
a	Acceleration:		
	Device unclamped		50 m/s <sup>2</sup>
	Device clamped		200 m/s <sup>2</sup>
m	Weight		0.14 kg
$D_s$	Surface creepage distance		4 mm
$D_a$	Air strike distance		4 mm

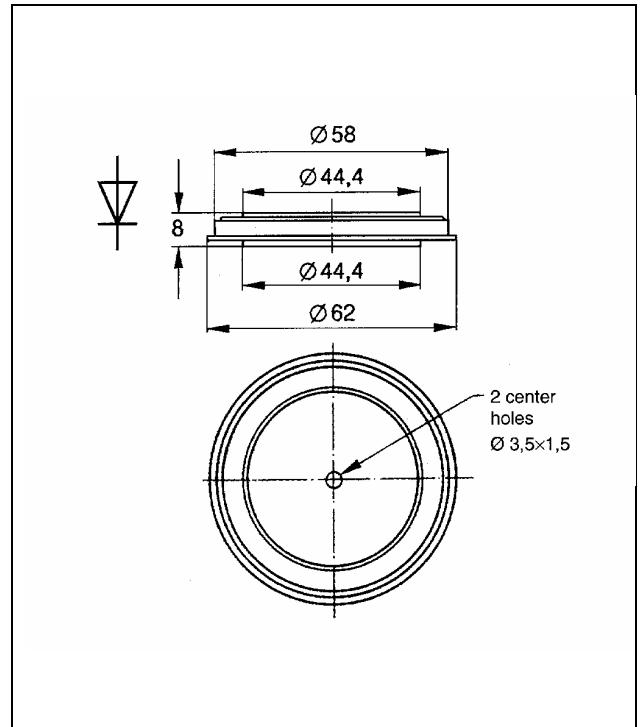

**Fig. 1**  
Outline drawing.  
All dimensions are in millimeters and represent nominal values unless stated otherwise.

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.

**ABB**

## On-state

$I_{FAVM}$	Max. average on-state current	7110 A	Half sine wave, $T_c = 85^\circ\text{C}$	
$I_{FRMS}$	Max. RMS on-state current	11200 A		
$I_{FSM}$	Max. peak non-repetitive surge current	55000 A	$t_p = 10 \text{ ms}$	Before surge
		60000 A	$t_p = 8.3 \text{ ms}$	$T_j = 170^\circ\text{C}$
$\int I^2 dt$	Max. surge current integral	15100 $\text{kA}^2\text{s}$	$t_p = 10 \text{ ms}$	After surge:
		15000 $\text{kA}^2\text{s}$	$t_p = 8.3 \text{ ms}$	$V_R \approx 0\text{V}$
$V_F \text{ max}$	Maximum on-state voltage	$\leq 1.05 \text{ V}$	$I_F = 5000 \text{ A}$	$T_j = 25^\circ\text{C}$
$V_{F0}$	Threshold voltage	0.74 V	Approximation for $I_F = 5 - 15 \text{ kA}$	$T_j = 170^\circ\text{C}$
$r_F$	Slope resistance	0.026 $\text{m}\Omega$		

## Thermal characteristics

$T_j$	Operating junction temperature range	-40...170 °C		
$T_{stg}$	Storage temperature range	-40...170 °C		
$R_{th(j-c)}$	Thermal resistance junction to case	$\leq 20 \text{ K/kW}$	Anode side cooled	$F_M = 20 \dots 24 \text{ kN}$
		$\leq 20 \text{ K/kW}$	Cathode side cooled	
		$\leq 10 \text{ K/kW}$	Double side cooled	
$R_{th(c-h)}$	Thermal resistance case to heatsink	$\leq 10 \text{ K/kW}$	Single side cooled	
		$\leq 5 \text{ K/kW}$	Double side cooled	



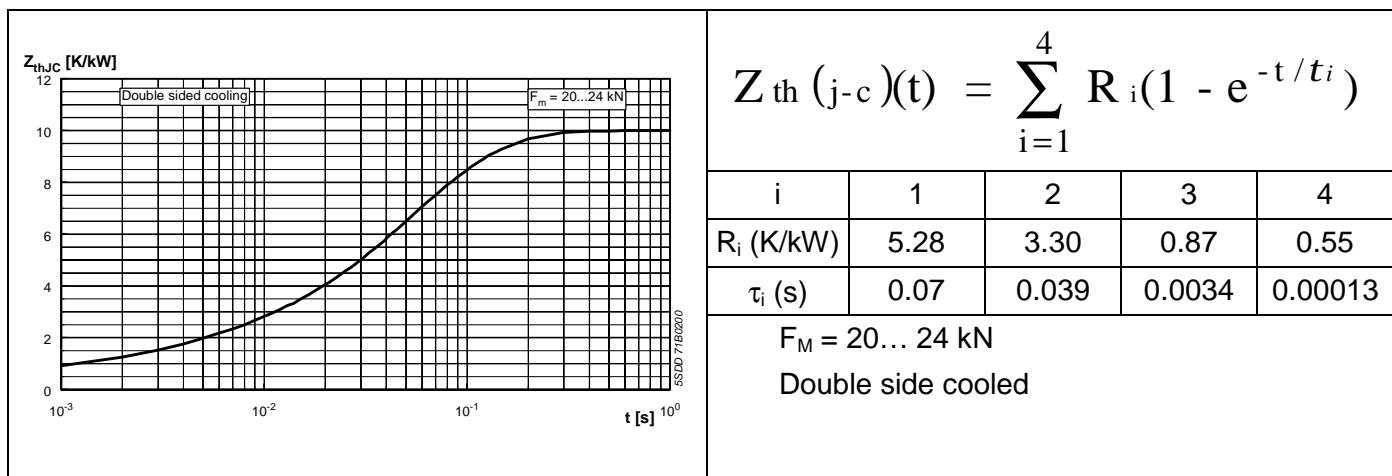


Fig. 2 Transient thermal impedance (junction-to-case) vs. time in analytical and graphical forms.


## On-state characteristics

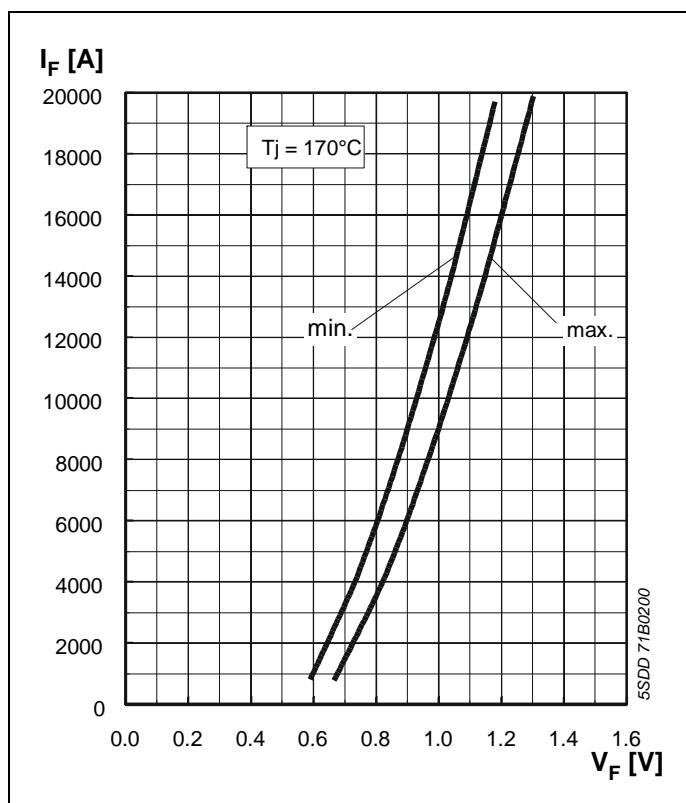

## Surge current characteristics

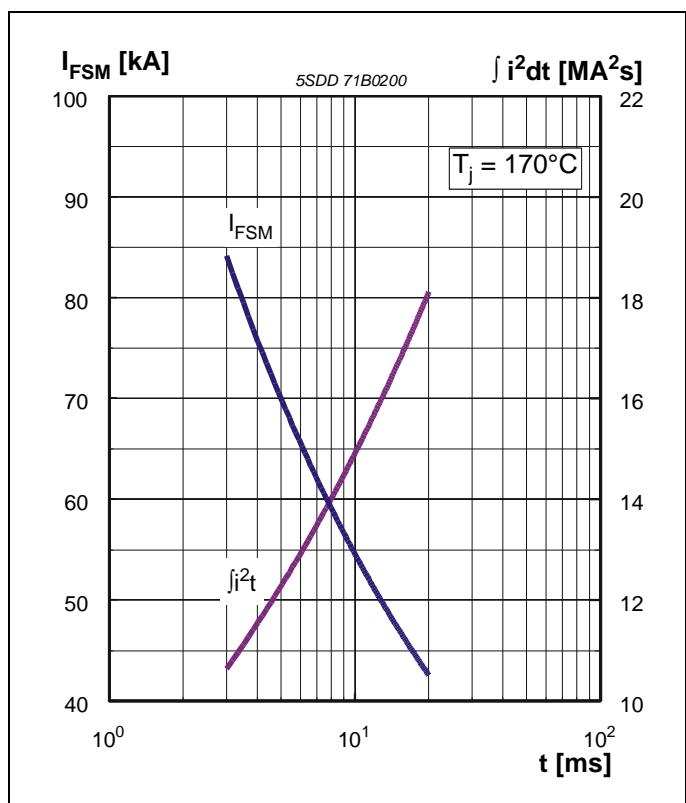

## Current load capability

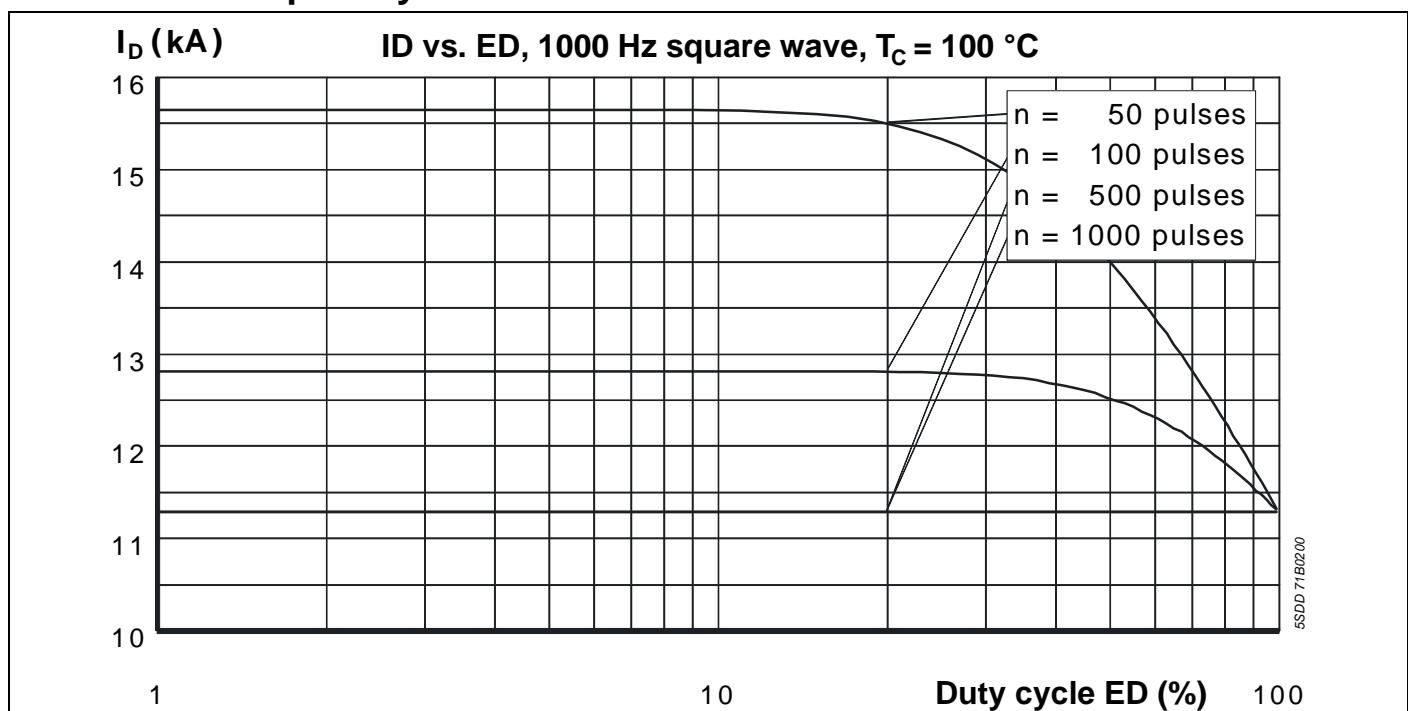

## Current load capacity, cont.

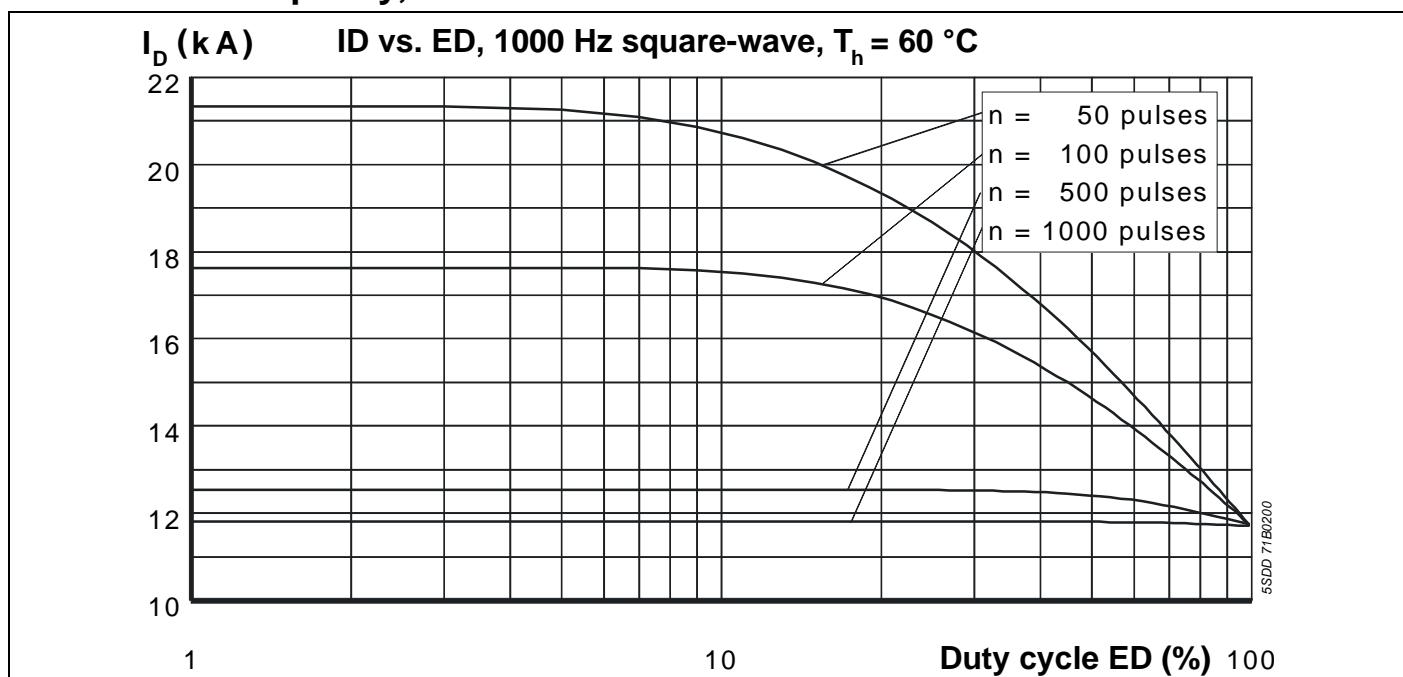


Fig. 6 DC-output current with single-phase centre tap

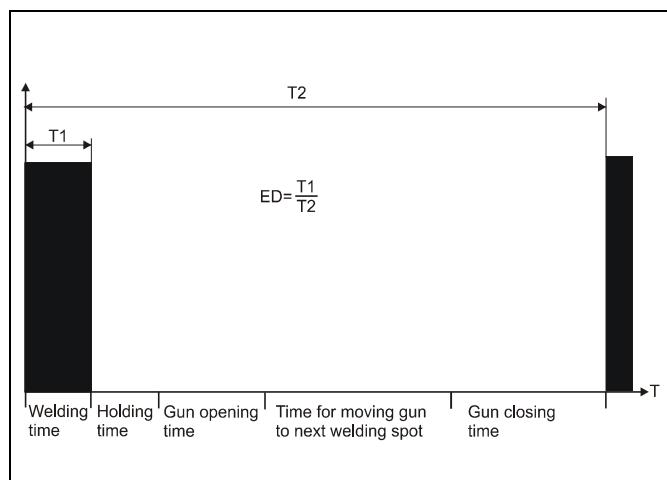


Fig. 7 Definition of ED for typical welding sequence

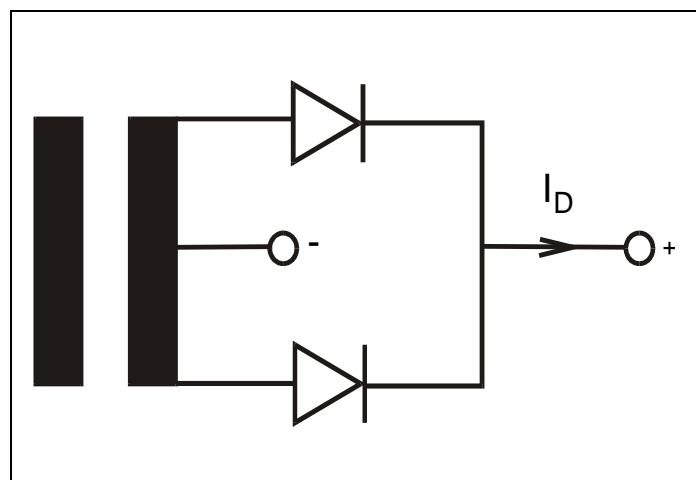


Fig. 8 Definition of ID for single-phase centre tap

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.

**ABB**

ABB Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
CH-5600 Lenzburg, Switzerland

Doc. No. 5SYA1132-02 July 06

Telephone	+41 (0)58 586 1419
Fax	+41 (0)58 586 1306
Email	<a href="mailto:abbsem@ch.abb.com">abbsem@ch.abb.com</a>
Internet	<a href="http://www.abb.com.semiconductors">www.abb.com.semiconductors</a>