


# Thyristor Module

$V_{RRM} = 2 \times 1400 \text{ V}$   
 $I_{TAV} = 320 \text{ A}$   
 $V_T = 1.08 \text{ V}$

## Phase leg


### Part number

MCC310-14io1

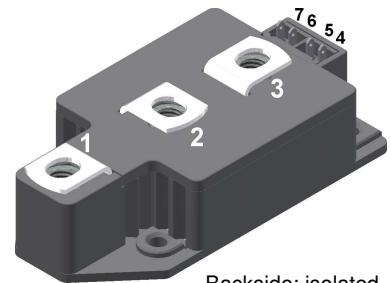

Backside: isolated

E72873

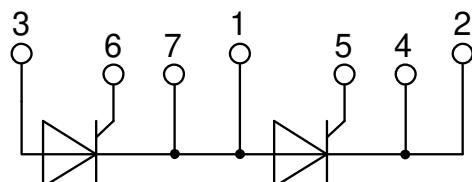

### Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al2O3-ceramic

### Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

### Package: Y2

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

### Terms and Conditions of Usage

The data contained in this product data sheet is exclusively intended for technically trained staff. The user will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to his application. The specifications of our components may not be considered as an assurance of component characteristics. The information in the valid application- and assembly notes must be considered. Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of your product, please contact your local sales office.


Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact your local sales office.

Should you intend to use the product in aviation, in health or life endangering or life support applications, please notify. For any such application we urgently recommend

- to perform joint risk and quality assessments;
- the conclusion of quality agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery dependent on the realization of any such measures.

Thyristor			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1500	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1400	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1400 V$ $V_{R/D} = 1400 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 140^\circ C$		1 40	mA
$V_T$	forward voltage drop	$I_T = 300 A$ $I_T = 600 A$ $I_T = 300 A$ $I_T = 600 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.14 1.32 1.08 1.30	V
$I_{TAV}$	average forward current	$T_C = 85^\circ C$	$T_{VJ} = 140^\circ C$		320	A
$I_{T(RMS)}$	RMS forward current	180° sine			500	A
$V_{TO}$	threshold voltage	$r_T$ slope resistance } for power loss calculation only	$T_{VJ} = 140^\circ C$		0.80	V
	slope resistance				0.82	mΩ
$R_{thJC}$	thermal resistance junction to case				0.11	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.040		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ C$		1030	W
$I_{TSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 V$ $T_{VJ} = 140^\circ C$ $V_R = 0 V$		9.20 9.94 7.82 8.45	kA
$I^2t$	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 V$ $T_{VJ} = 140^\circ C$ $V_R = 0 V$		423.2 410.6 305.8 296.7	kA²s
$C_J$	junction capacitance	$V_R = 400 V$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	438		pF
$P_{GM}$	max. gate power dissipation	$t_p = 30 \mu s$ $t_p = 500 \mu s$	$T_C = 140^\circ C$		120 60 20	W
$P_{GAV}$	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 140^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 960 A$ $t_p = 200 \mu s; di_G/dt = 1 A/\mu s;$ $I_G = 1 A; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 320 A$			100	A/μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$ ; method 1 (linear voltage rise)	$T_{VJ} = 140^\circ C$		1000	V/μs
$V_{GT}$	gate trigger voltage	$V_D = 6 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		2 3	V
$I_{GT}$	gate trigger current	$V_D = 6 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		150 200	mA
$V_{GD}$	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^\circ C$		0.25	V
$I_{GD}$	gate non-trigger current				10	mA
$I_L$	latching current	$t_p = 30 \mu s$ $I_G = 0.45 A; di_G/dt = 0.45 A/μs$	$T_{VJ} = 25^\circ C$		200	mA
$I_H$	holding current	$V_D = 6 V$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ C$		150	mA
$t_{gd}$	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^\circ C$		2	μs
$t_q$	turn-off time	$V_R = 100 V; I_T = 320 A; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ C$ $di/dt = 10 A/\mu s$ $dv/dt = 50 V/\mu s$ $t_p = 200 \mu s$		200		μs


Package Y2			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	<i>RMS current</i>	per terminal			600	A
$T_{VJ}$	<i>virtual junction temperature</i>		-40		140	°C
$T_{op}$	<i>operation temperature</i>		-40		125	°C
$T_{stg}$	<i>storage temperature</i>		-40		125	°C
<b>Weight</b>				255		g
$M_D$	<i>mounting torque</i>		2.5		5	Nm
$M_T$	<i>terminal torque</i>		12		15	Nm
$d_{Spp/App}$	<i>creepage distance on surface / striking distance through air</i>		terminal to terminal	13.0		mm
$d_{Spb/Apb}$			terminal to backside	13.0		mm
$V_{ISOL}$	<i>isolation voltage</i>	$t = 1 \text{ second}$ $t = 1 \text{ minute}$	50/60 Hz, RMS; $I_{ISOL} \leq 1 \text{ mA}$	3600 3000		V V

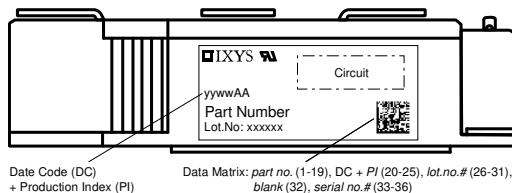




Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCC310-14io1	MCC310-14io1	Box	2	428620

## Equivalent Circuits for Simulation

\* on die level

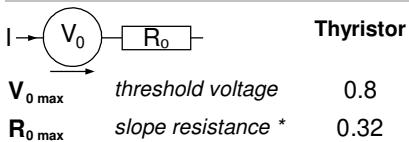 $T_{VJ} = 140 \text{ °C}$ 

## Outlines Y2

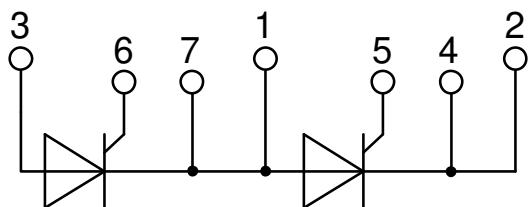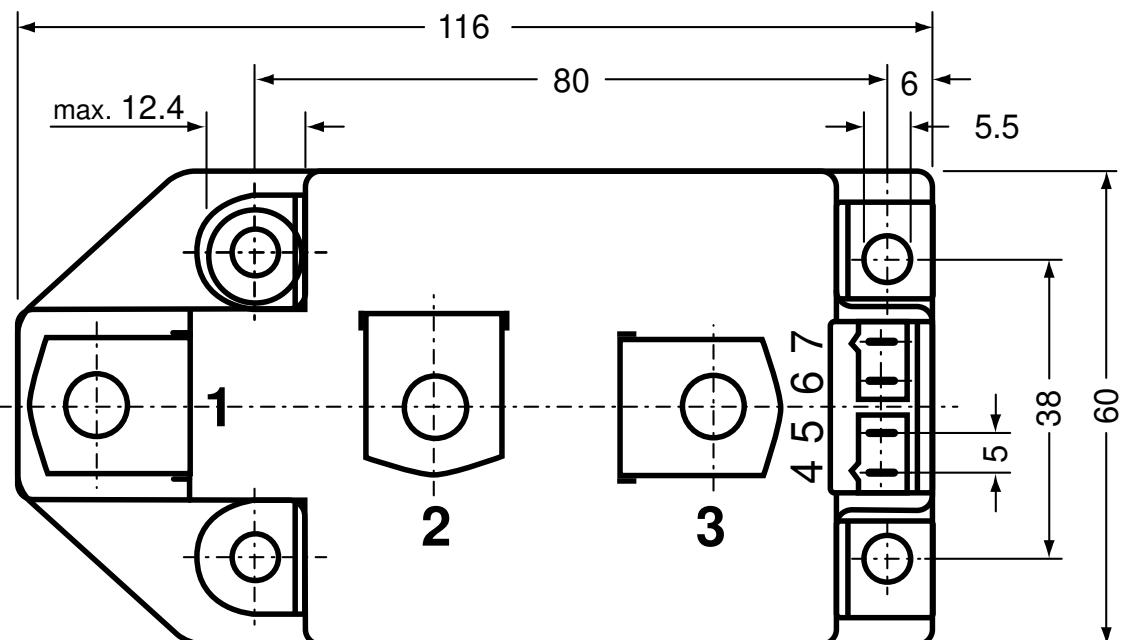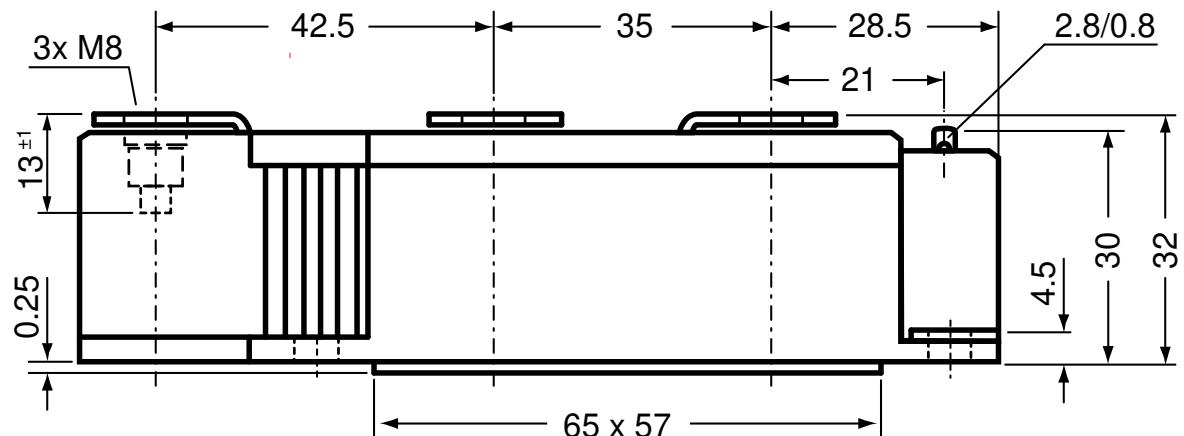

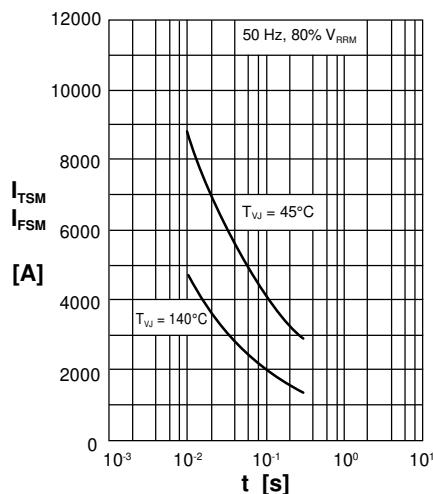
**Thyristor**

Fig. 1 Surge overload current  
 $I_{(F)SM}$ : crest value,  $t$ : duration

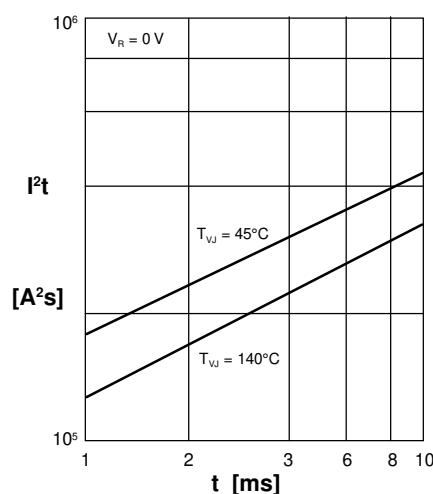


Fig. 2  $I^2t$  versus time (1-10 ms)

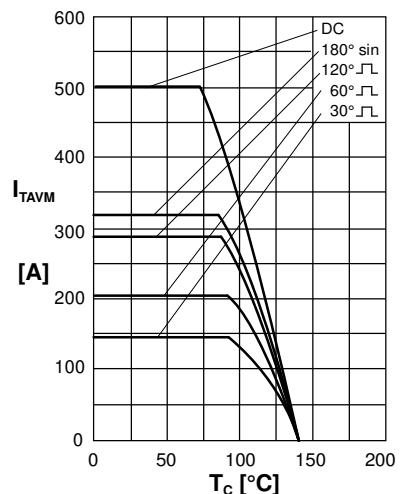


Fig. 3 Max. forward current  
at case temperature

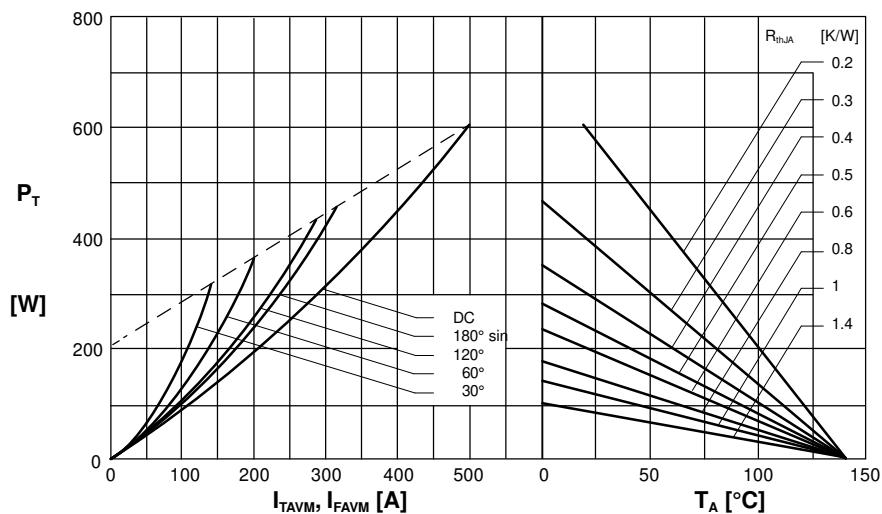


Fig. 4 Power dissipation versus onstate current and•  
ambient temperature (per thyristor/diode)

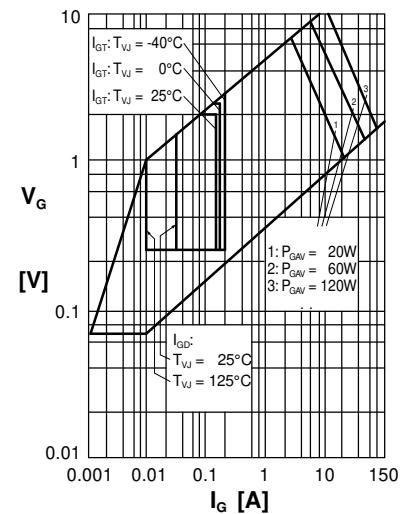


Fig. 5 Gate trigger characteristics

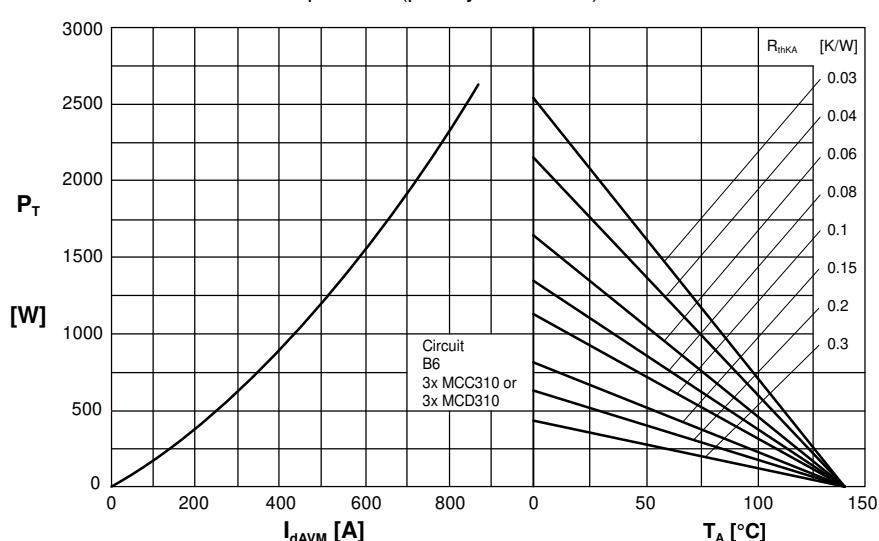


Fig. 6 Three phase rectifier bridge: Power dissipation versus  
direct output current and ambient temperature

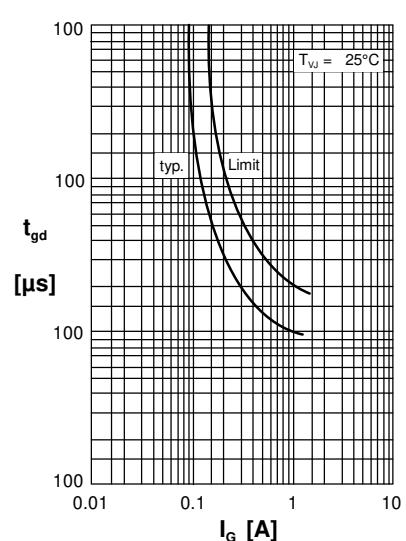


Fig. 7 Gate trigger delay time

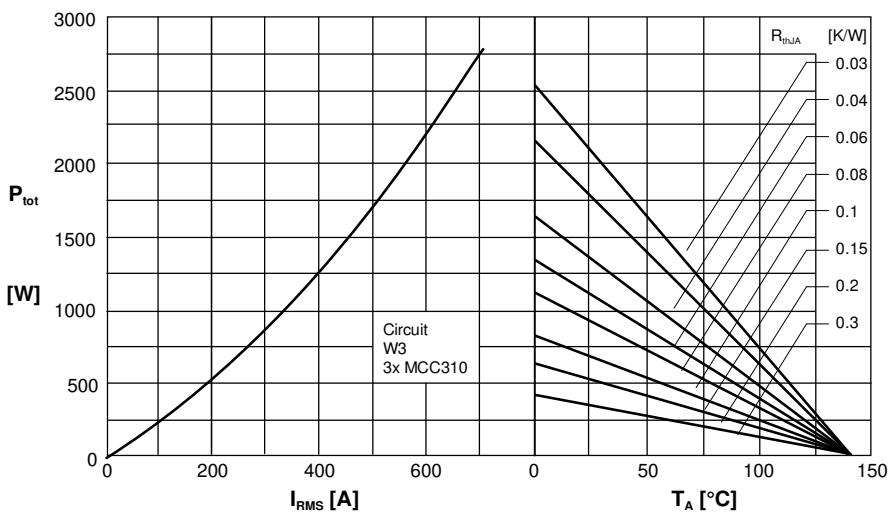
**Thyristor**

Fig. 7 Three phase AC-controller: •  
Power dissipation versus RMS output current and ambient temperature

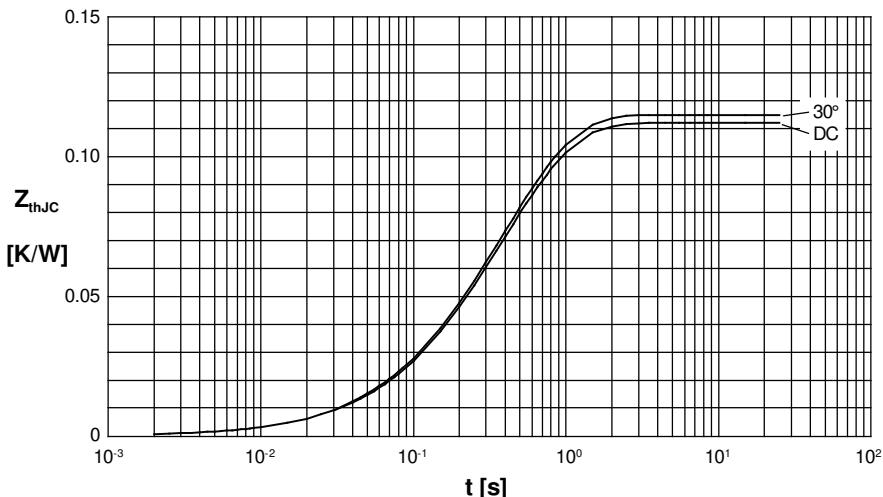


Fig. 8 Transient thermal impedance junction to case (per thyristor)

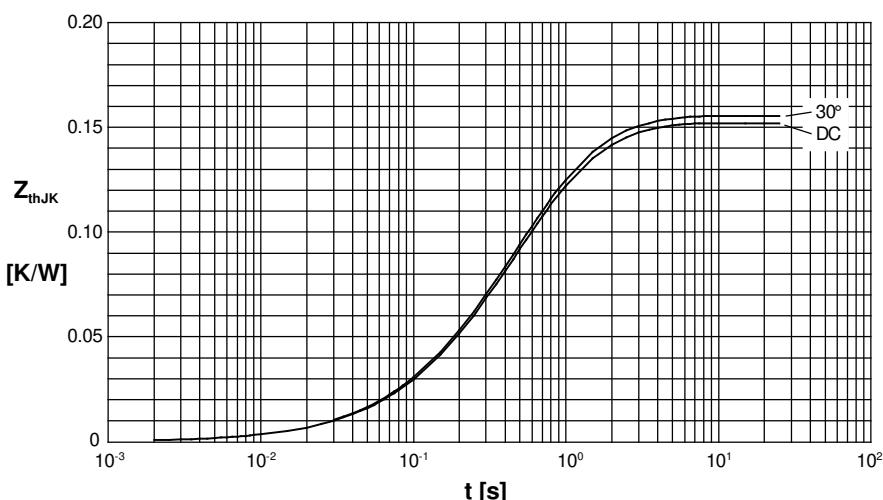


Fig. 9 Transient thermal impedance junction to heatsink (per thyristor)

$R_{thJC}$  for various conduction angles  $d$ :

$d$	$R_{thJC}$ (K/W)
DC	0.112
180°C	0.113
120°C	0.114
60°C	0.115
30°C	0.115

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ [K/W]	$t_i$ [s]
1	0.003	0.099
2	0.0143	0.168
3	0.0947	0.456

$R_{thJK}$  for various conduction angles  $d$ :

$d$	$R_{thJK}$ [K/W]
DC	0.152
180°C	0.154
120°C	0.154
60°C	0.155
30°C	0.155

Constants for  $Z_{thJK}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.003	0.099
2	0.0143	0.168
3	0.0947	0.456
4	0.04	1.36