

ANSALDO**Ansaldo Trasporti s.p.a.**
Unita' SemiconduttoriVia N. Lorenzi 8 - I 16152 GENOVA - ITALY
Tel. int. +39/(0)10 6556549 - (0)10 6556488
Fax Int. +39/(0)10 6442510
Tx 270318 ANSUE I -**PHASE CONTROL THYRISTOR****AT1005**

Repetitive voltage up to	1800 V
Mean on-state current	1450 A
Surge current	22.4 kA

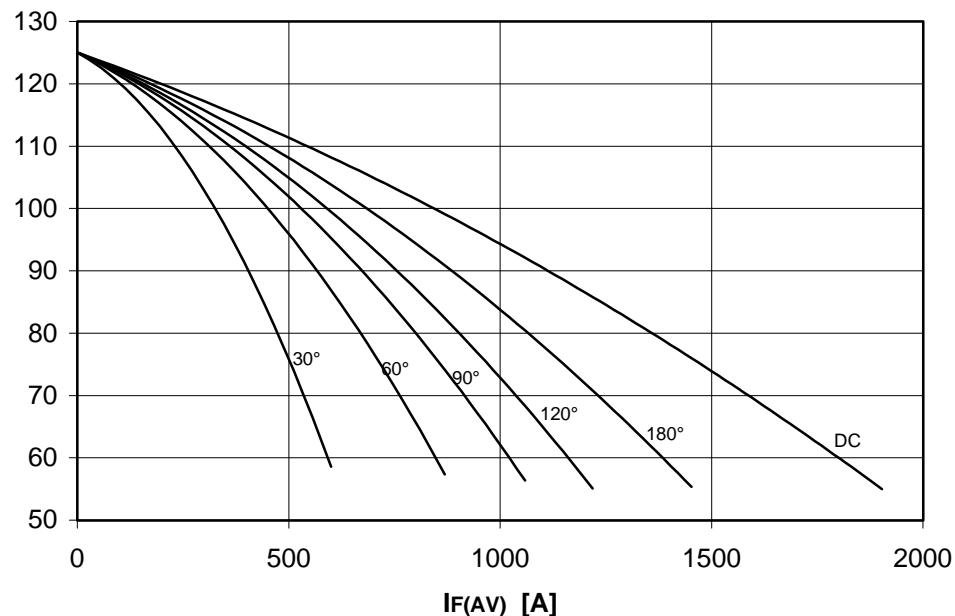
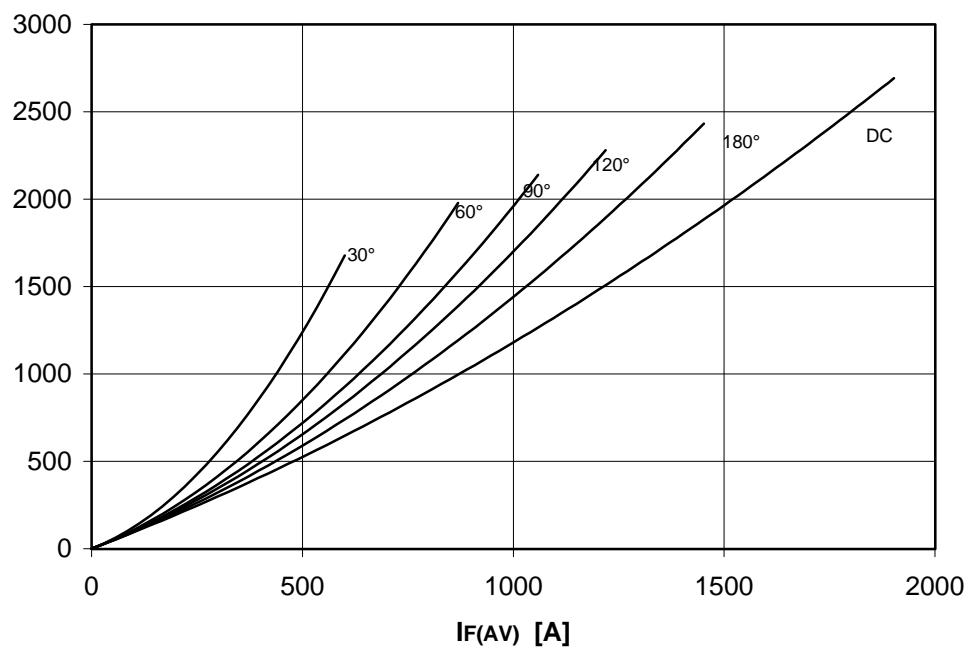
FINAL SPECIFICATION

feb 97 - ISSUE : 03

Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		125	1800	V
V _{RSM}	Non-repetitive peak reverse voltage		125	1900	V
V _{DRM}	Repetitive peak off-state voltage		125	1800	V
I _{RRM}	Repetitive peak reverse current	V=V _{RRM}	125	50	mA
I _{DRM}	Repetitive peak off-state current	V=V _{DRM}	125	50	mA
CONDUCTING					
I _{T(AV)}	Mean on-state current	180° sin, 50 Hz, Th=55°C, double side cooled		1450	A
I _{T(AV)}	Mean on-state current	180° sin, 50 Hz, Tc=85°C, double side cooled		1190	A
I _{TSM}	Surge on-state current	sine wave, 10 ms without reverse voltage	125	22.4	kA
I ² t	I ² t			2509 x1E3	A ² s
V _T	On-state voltage	On-state current = 2900 A	25	1.75	V
V _{T(TO)}	Threshold voltage		125	0.92	V
r _T	On-state slope resistance		125	0.260	mohm
SWITCHING					
di/dt	Critical rate of rise of on-state current, min.	From 75% V _{DRM} up to 1580 A, gate 10V 5ohm	125	200	A/μs
dv/dt	Critical rate of rise of off-state voltage, min.	Linear ramp up to 70% of V _{DRM}	125	500	V/μs
td	Gate controlled delay time, typical	VD=100V, gate source 25V, 10 ohm, tr.=5 μs	25	1.1	μs
tq	Circuit commutated turn-off time, typical	dV/dt = 20 V/μs linear up to 75% V _{DRM} di/dt=-20 A/μs, I= 1050 A	125	250	μs
Q _{rr}	Reverse recovery charge				μC
I _{rr}	Peak reverse recovery current				A
I _H	Holding current, typical	VD=5V, gate open circuit	25	300	mA
I _L	Latching current, typical	VD=5V, tp=30μs	25	700	mA
GATE					
V _{GT}	Gate trigger voltage	VD=5V	25	3.5	V
I _{GT}	Gate trigger current	VD=5V	25	300	mA
V _{GD}	Non-trigger gate voltage, min.	VD=V _{DRM}	125	0.25	V
V _{FGM}	Peak gate voltage (forward)			30	V
I _{FGM}	Peak gate current			10	A
V _{RGM}	Peak gate voltage (reverse)			5	V
P _{GM}	Peak gate power dissipation	Pulse width 100 μs		150	W
P _G	Average gate power dissipation			2	W
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		26	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		6	°C/kW
T _j	Operating junction temperature			-30 / 125	°C
F	Mounting force			18.0 / 20.0	KN
Mass				500	g
ORDERING INFORMATION : AT1005 S 18					
standard specification		V _{DRM} &V _{RRM} /100			

DISSIPATION CHARACTERISTICS

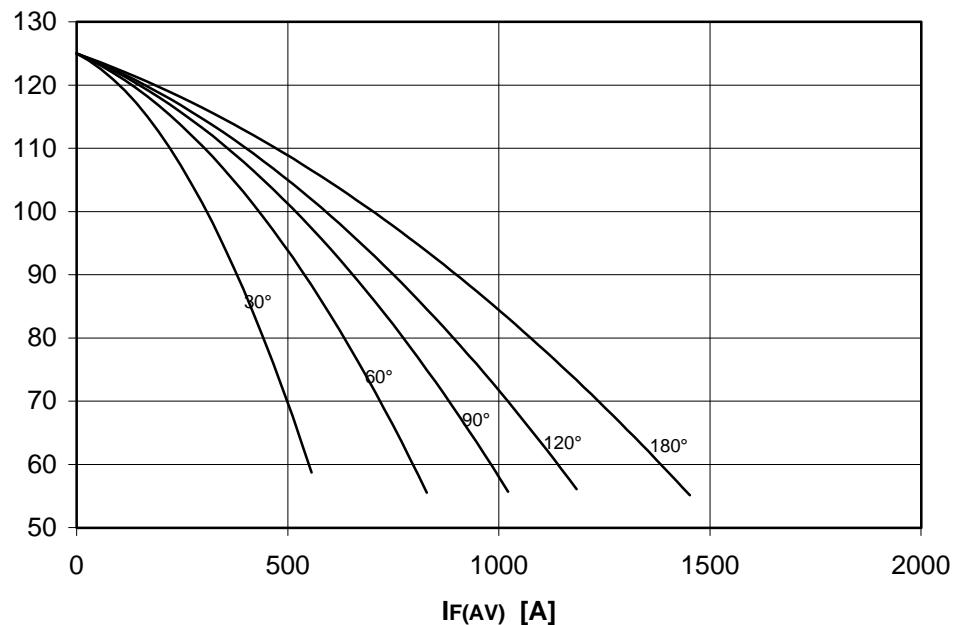
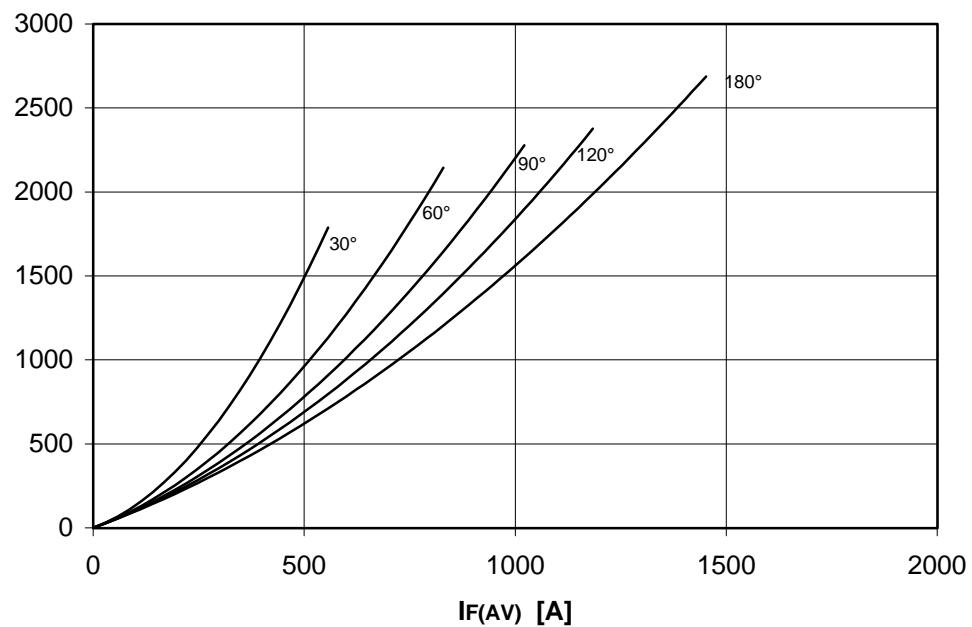
SQUARE WAVE

 T_h [°C] $P_F(AV)$ [W]

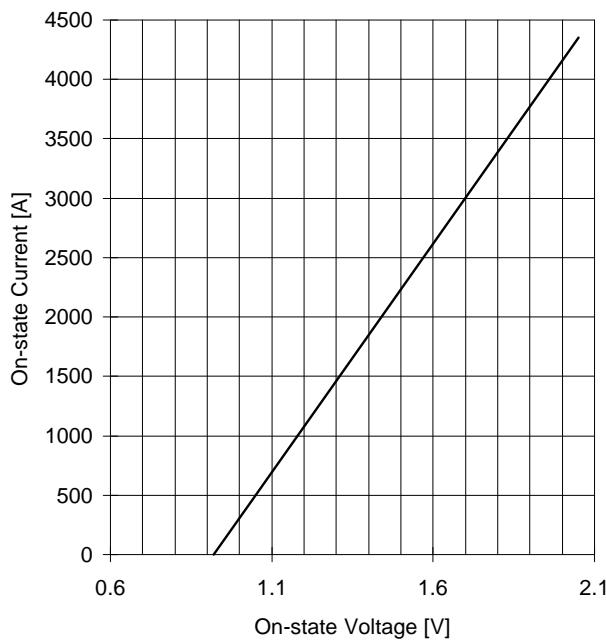
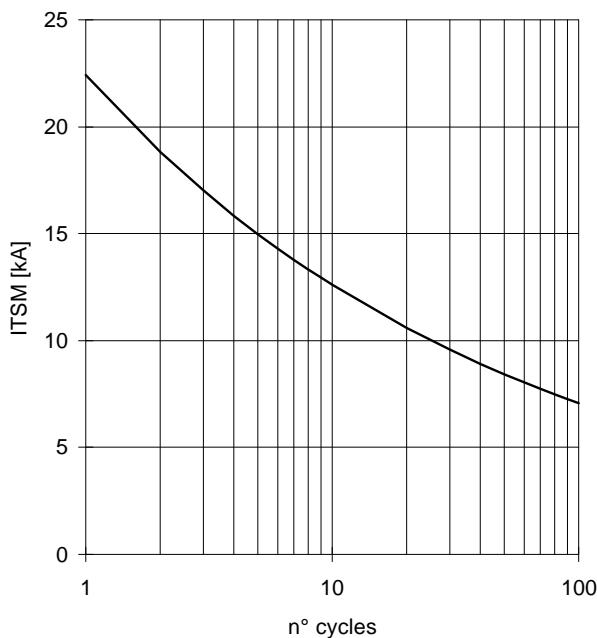
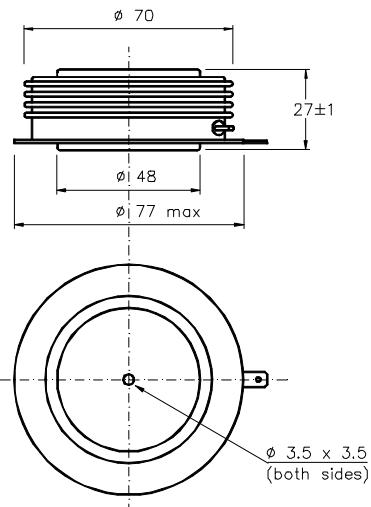
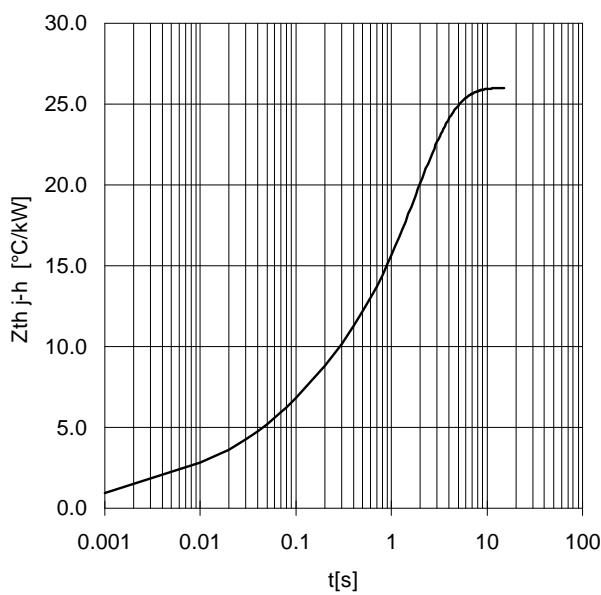
FINAL SPECIFICATION feb 97 - ISSUE : 03

DISSIPATION CHARACTERISTICS

SINE WAVE

 Th [°C] $P_{F(AV)}$ [W]

FINAL SPECIFICATION feb 97 - ISSUE : 03

ON-STATE CHARACTERISTIC
 $T_j = 125 \text{ }^\circ\text{C}$ SURGE CHARACTERISTIC
 $T_j = 125 \text{ }^\circ\text{C}$ TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLEDDimensions
in mmCathode terminal type DIN 46244 - A 4.8 - 0.8
Gate terminal type AMP 60598 - 1

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm .

In the interest of product improvement ANSALDO reserves the right to change any data given in this data sheet at any time without previous notice.

If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

